


APP CRS 280°	Rwy Ldg 3803
	TDZE 422
	Apt Elev 424

RNAV (GPS) RWY 28


WILLIAMSON/SODUS (SDC)

RNP APCH - GPS.	<p>Procedure NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Rochester altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C 1/8 SM, and Circling visibility Cat C 1/4 SM.</p>	<p>MISSED APPROACH: Climb to 3000 direct GOYER and hold.</p>
-----------------	---	---

AWOS-3 124.2	ROCHESTER APP CON 119.55 269.6	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

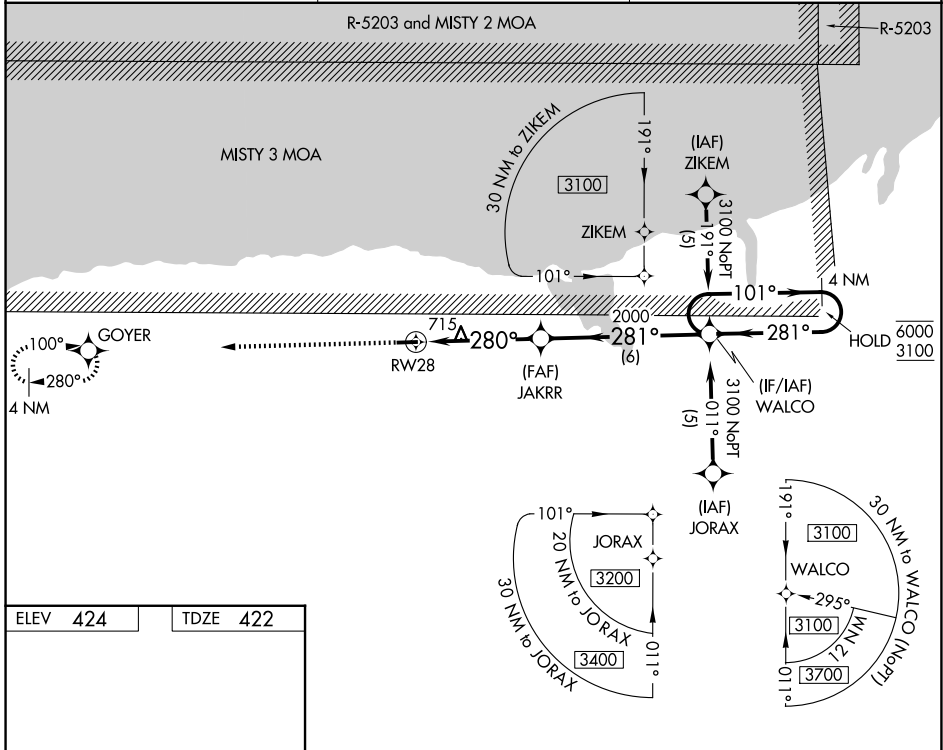

ELEV 424	TDZE 422
<p>MIRL Rwy 10-28 0 REIL Rwy 10 and 28 0</p>	

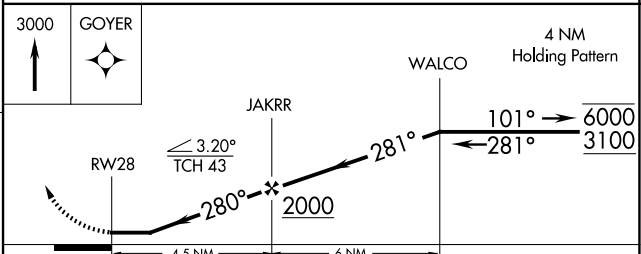

CATEGORY	A	B	C	D
LNAV MDA	980-1	558 (600-1)	980-1 5/8 558 (600-1 5/8)	NA
CIRCLING	1000-1 576 (600-1)	1020-1 596 (600-1)	1120-2 696 (700-2)	NA

NE-2, 11 JUN 2026 to 09 JUL 2026

NE-2, 11 JUN 2026 to 09 JUL 2026