

WAAS CH 99347 W21A	APP CRS 210°	Rwy Ldg 4000 TDZE 21 Apt Elev 21
--	------------------------	---

RNAV (GPS) RWY 21


POINT HOPE (PHO) (PAPO)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Rwy 21 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using LUR/PALU altimeter setting. When local altimeter setting not received, use LUR/PALU altimeter setting and increase LPV DA to 303 feet; increase LNAV/VNAV DA to 353 feet; increase all MDAs 100 feet and LNAV visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 700 then climbing left turn to 3000 direct PERPL and hold, continue climb-in-hold to 3000.

AWOS-3P 118.325	ANCHORAGE CENTER 119.65 363.25	KOTZEBUE RADIO 122.25	CTAF 122.8 0
---------------------------	--	---------------------------------	------------------------

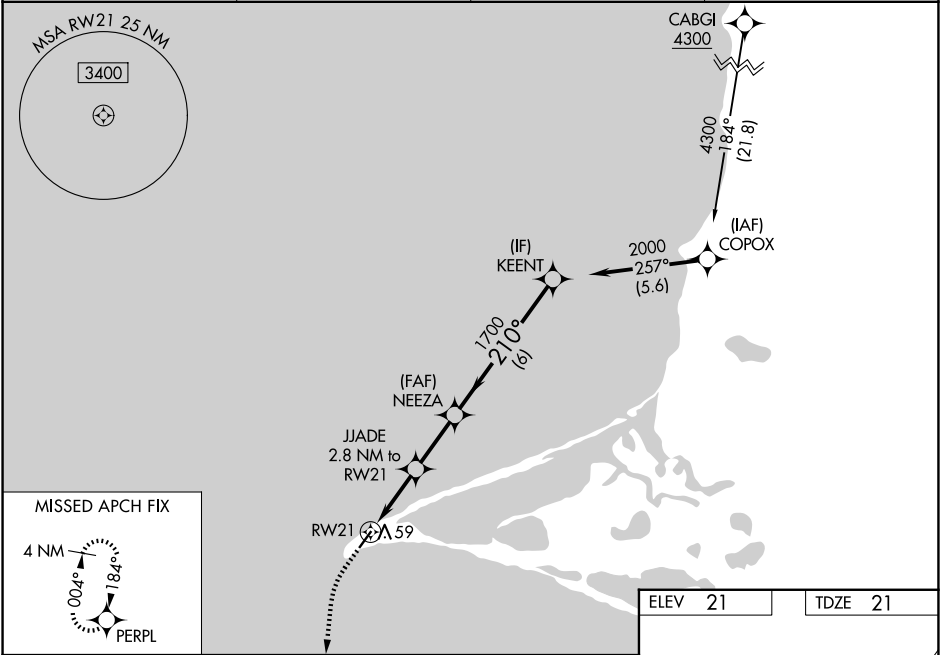

700		3000	PERPL	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).		KEENT
0.9 NM to RW21		JJADE 2.8 NM to RW21	NEEZA 1700	210°		2000
RW21 940			1700	GP 3.00° TCH 40		
0.9		1.9 NM	2.4 NM	6 NM		
CATEGORY	A	B	C	D		
LPV DA	221-1		200 (200-1)			
LNAV/VNAV DA	271-1		250 (300-1)			
LNAV MDA	320-1		299 (300-1)			
CIRCLING	380-1 359 (400-1)	480-1 459 (500-1)	480-1½ 459 (500-1½)	580-2 559 (600-2)		

