WAAS CH 90318 W34B	APP CRS 353°	Rwy Ldg 12000 TDZE 5354 Apt Elev 5434

RNAV (GPS) Y RWY 34R

DENVER INTL (DEN)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM.

ALSF-2

MISSED APPROACH: Climb to 10000 direct PIPSY and on track 315° to NIWOT and hold.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON
125.6 379.9	119.3 307.3 (N) 120.35 379.3 (S)	135.3 351.95	121.35 379.175 (W) 121.85 377.1 (E)

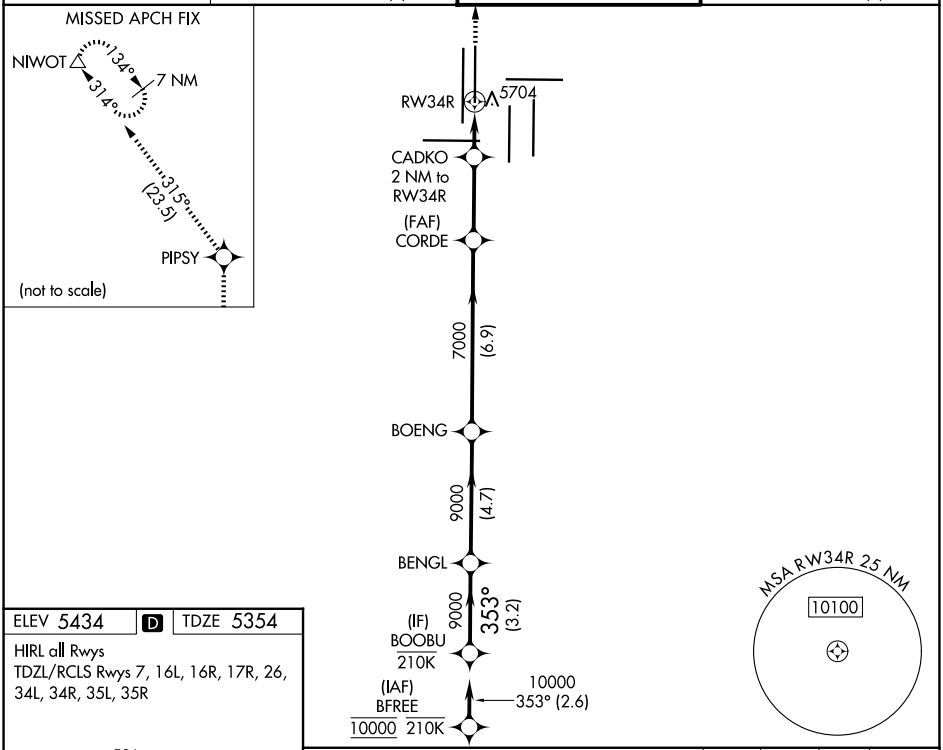

ELEV 5434	D	TDZE 5354

HIRL all Rwys
TDZL/RCLS Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R

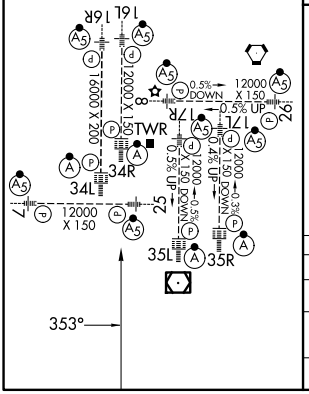

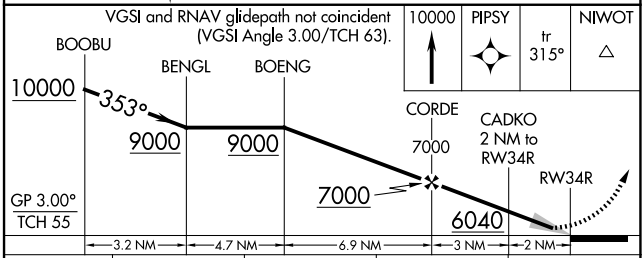

CATEGORY	A	B	C	D
LPV DA	5554/18 200 (200-½)			
LNAV/VNAV DA	5842/50 488 (500-1)			
LNAV MDA	5940/24 586 (600-½)		5940-1¼ 586 (600-1¼)	

SW-1, 11 JUN 2026 to 09 JUL 2026
SW-1, 11 JUN 2026 to 09 JUL 2026