WAAS CH **97712** **W36A** | APP CRS **360°** | Rwy Ldg **5905** TDZE **725** Apt Elev **734**

RNAV (GPS) RWY 36

MOUNT STERLING MUNI (I63)

RNP APCH - GPS.

Rwy 36 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using UIN altimeter setting. When local altimeter setting not received, use UIN altimeter setting and increase LPV DA to 1062 feet; increase LNAV/VNAV DA to 1041; increase all MDAs 60 feet and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 2700 direct HAGDO and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
118.325	**126.225 317.775**	**122.8** (CTAF) L

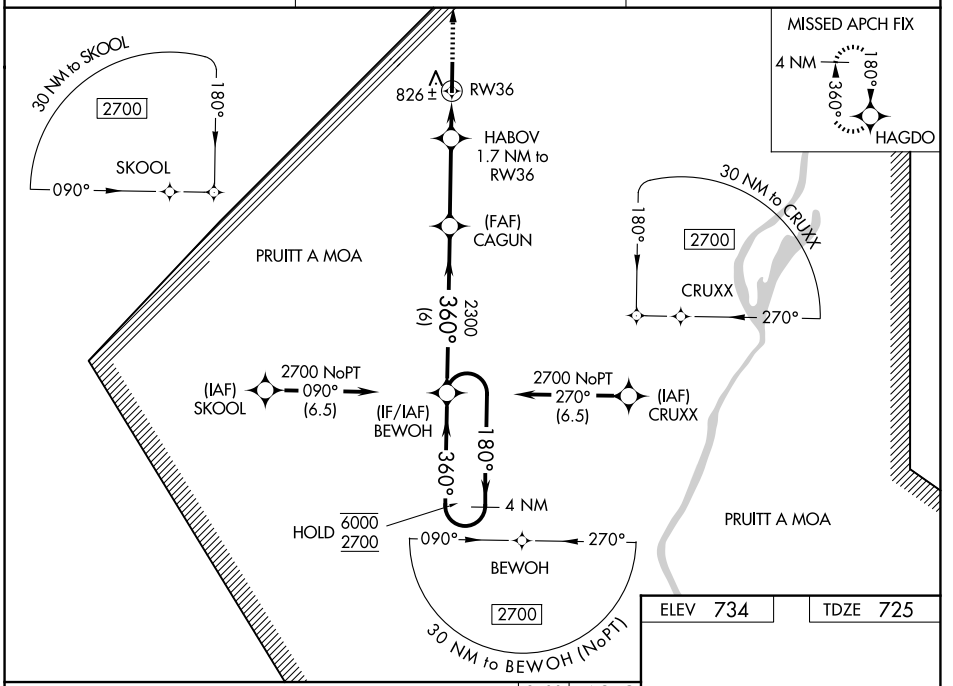

ELEV 734 | TDZE 725

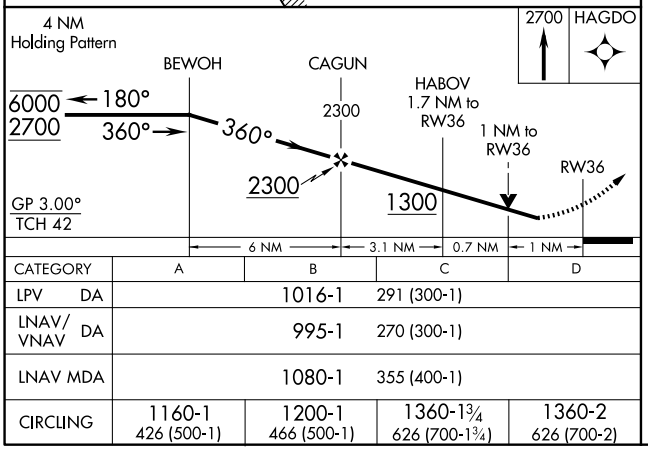

CATEGORY	A	B	C	D
LPV DA		1016-1	291 (300-1)	
LNAV/VNAV DA		995-1	270 (300-1)	
LNAV MDA		1080-1	355 (400-1)	
CIRCLING	1160-1 426 (500-1)	1200-1 466 (500-1)	1360-1¾ 626 (700-1¾)	1360-2 626 (700-2)

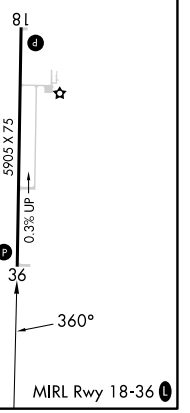

EC-3, 11 JUN 2026 to 09 JUL 2026
EC-3, 11 JUN 2026 to 09 JUL 2026