

APP CRS	Rwy Ldg	3219
184°	TDZE	19
	Apt Elev	21

RNAV (GPS) RWY 18

TAMPA EXEC (VDF)

RNP APCH.


▼ When local altimeter not received, use Tampa Intl altimeter setting and increase all MDA 40 feet. Straight-in Rwy 18 NA at night, Circling Rwy 18, 36 NA at night. Rwy 18 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 direct COLUD and hold, continue climb-in-hold to 3000.

AWOS-3
121.125



TAMPA APP CON
119.9 290.3

UNICOM
122.7 (CTAF)

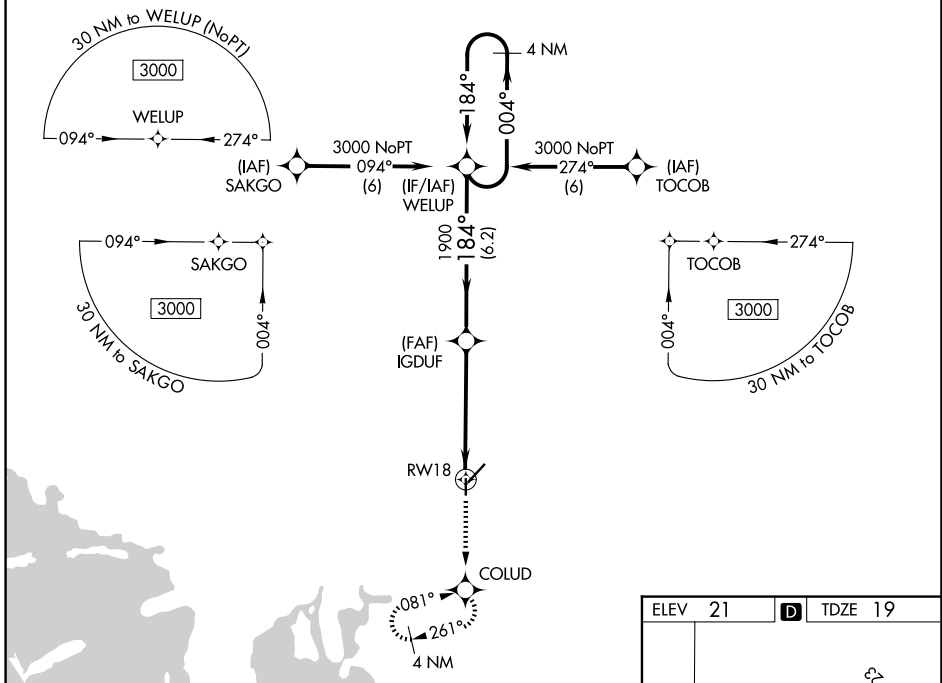

SE-3, 11 JUN 2026 to 09 JUL 2026

SE-3, 11 JUN 2026 to 09 JUL 2026

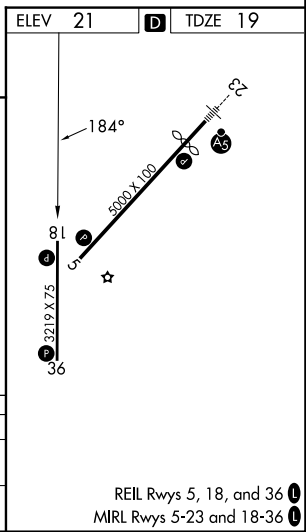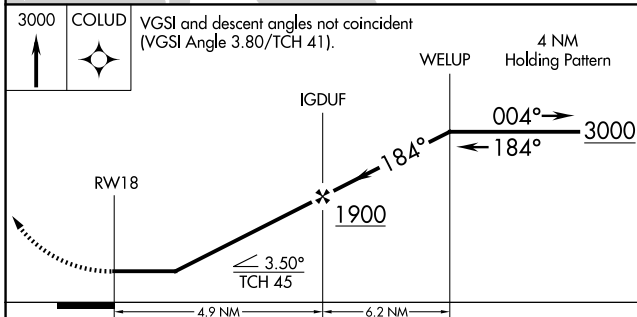

CATEGORY	A	B	C	D
LNVA MDA	580-1	561 (600-1)		NA
CIRCLING	580-1 559 (600-1)	760-1 739 (800-1)		NA

REIL Rwy 5, 18, and 36
MRL Rwy 5-23 and 18-36