
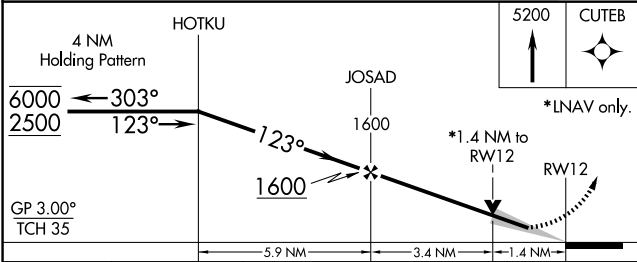


WAAS CH 99311 W12A	APP CRS 123°	Rwy Ldg 4000 TDZE 42 Apt Elev 42
--	------------------------	---

RNAV (GPS) RWY 12
QUINHAGAK (AQH) (PAQH)

RNP APCH.	Procedure NA at night. Baro-VNAV and VDP NA when using Kipnuk altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Kipnuk altimeter setting and increase all DA and MDA 160 feet; increase LPV all Cats visibility and LNAV/VNAV all Cats visibility ¼ SM, LNAV Cats C, D visibility ⅜ SM, increase Circling Cat C visibility ½ SM, increase Circling Cat D visibility ¼ SM.	MISSED APPROACH: Climb to 5200 direct CUTEB and hold, continue climb-in-hold to 5200.
-----------	---	---

AWOS-3P 121.575	ANCHORAGE CENTER 125.2 372.0	KENAI RADIO 122.1	UNICOM 122.8 (CTAF) 0
---------------------------	--	-----------------------------	---------------------------------

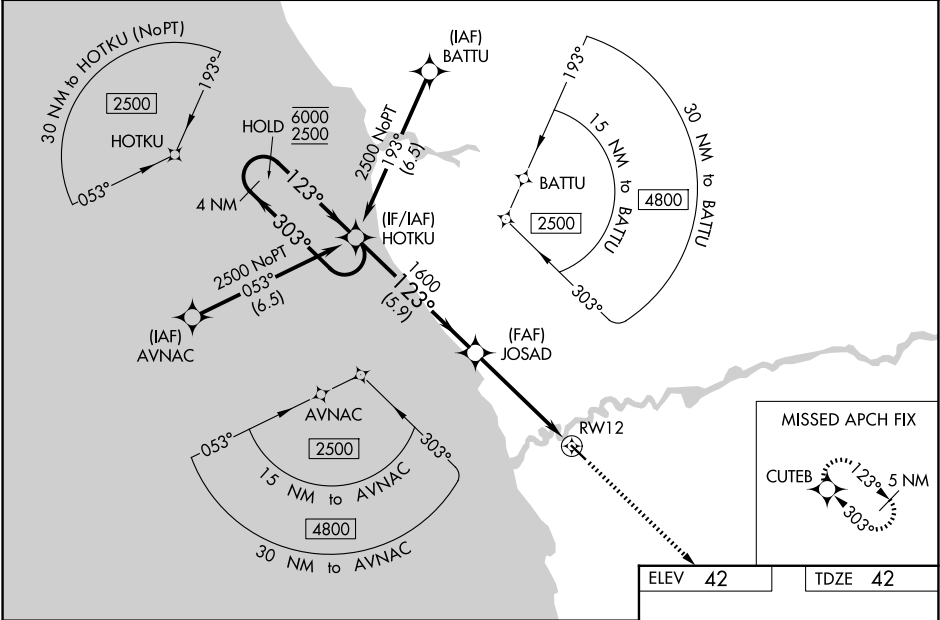

CATEGORY	A	B	C	D
LPV DA	292-1 250 (300-1)			
LNAV/VNAV DA	292-1 250 (300-1)			
LNAV MDA	500-1	458 (500-1)	500-1⅜	458 (500-1⅜)
CIRCLING	500-1	458 (500-1)	580-1½ 538 (600-1½)	600-2 558 (600-2)

