

APP CRS 011°	Rwy Ldg TDZE 285 Apt Elev 285	RNAV (RNP) Z RWY 1 ALBANY INTL (ALB)	
------------------------	---	---	--

GPS required. For uncompensated Baro-VNAV systems, procedure NA below -15°C (3°F) or above 47°C (117°F). For inoperative MALSR, increase RNP 0.15 visibility to 1½ and RNP 0.30 visibility to 1½.	MALSR MISSED APPROACH: Climb to 3000 on track 011° to OXFIC and on track 357° to OTOLE and hold.
--	--

D-ATIS 120.45	ALBANY APP CON 132.825 307.2	ALBANY TOWER 119.5 257.8	GND CON 121.7 348.6	CLNC DEL 127.50
-------------------------	--	------------------------------------	-------------------------------	---------------------------

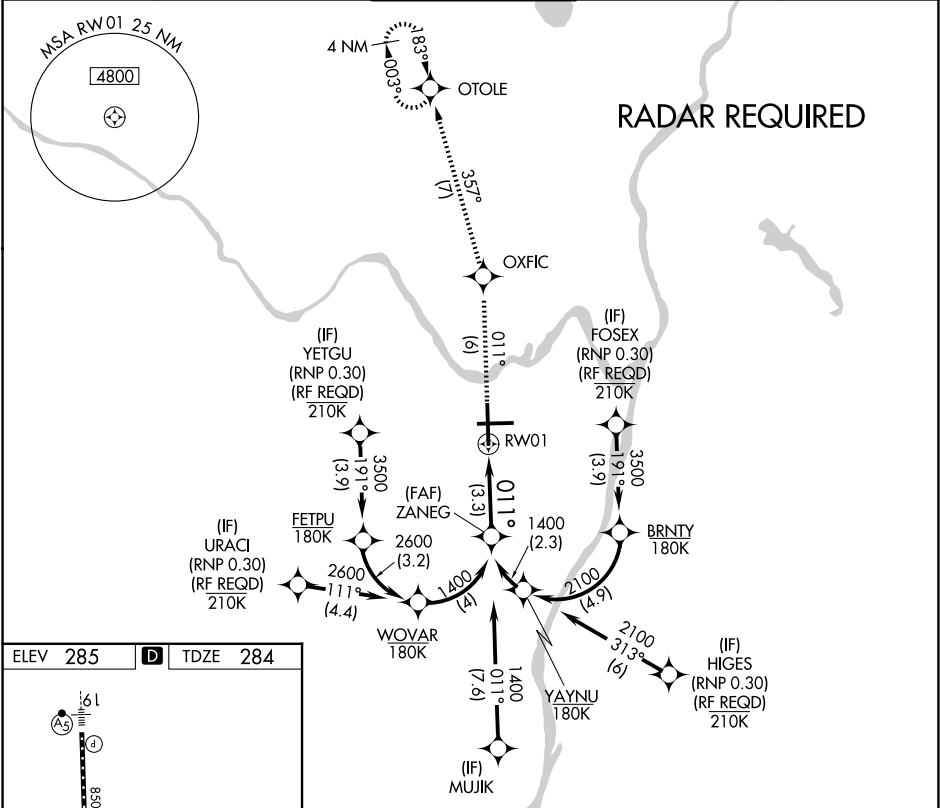


Diagram showing runway layout and navigation aids:

- Runway 10-28: 7200 X 150, 0.3% DOWN.
- Runway 1: TDZ/CL Rwy 1, HIRL Rwy 1-19 and 10-28, REIL Rwy 10 and 28.
- Navigation Aids: TWR, TWY, RWY, and A5.
- Heading: 011°.

Diagram showing instrument flight procedures and authorization requirements:

- Altitudes: 3000, 1400, 1400.
- Headings: 011°, 357°.
- Distance: 3.3 NM.
- GP 3.00° TCH 56.
- Procedure: See planview for multiple IF locations.
- Authorization Required: AUTHORIZATION REQUIRED.

CATEGORY	A	B	C	D
RNP 0.15 DA		656/40	372 (400-¾)	
RNP 0.30 DA		727/50	443 (500-1)	