

LOC I-BXY 111.9	APP CRS 135°	Rwy Ldg TDZE Apt Elev
		5800 386 394

ILS or LOC RWY 13

LEHIGH VALLEY INTL (ABE)

⚠



For inoperative MALSRS, increase IZKIP fix minimums S-LOC 13 Cat C/D visibility to 1 mile.

MALSRS

MISSED APPROACH:

Climb to 1300 then climbing left turn to 3000 on heading 060° and on SBJ VOR/DME R-295 to IZZI INT and hold.

ATIS 126.975	ALLENTOWN APP CON 119.65 124.45 351.8	ALLENTOWN TOWER 120.5 257.95	GND CON 121.9 257.95	CLNC DEL 124.05 257.95
------------------------	---	--	--------------------------------	----------------------------------

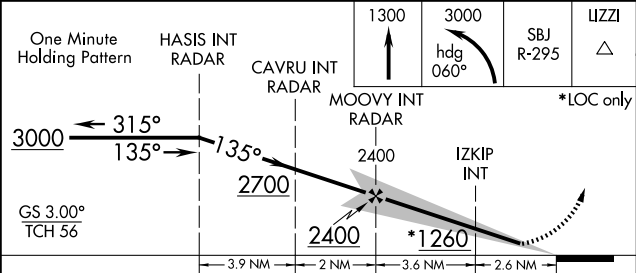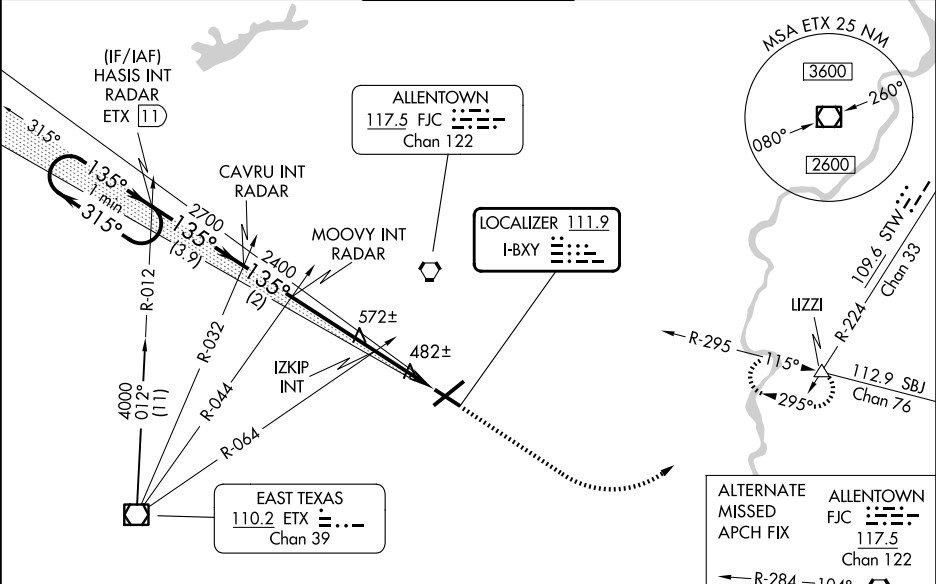

CATEGORY	A	B	C	D
S-ILS 13	586-½ 200 (200-½)			
S-LOC 13	1260-½ 874 (900-½)	1260-¾ 874 (900-¾)	1260-2 874 (900-2)	
CIRCLING	1260-1¼ 866 (900-1¼)	1260-2½ 866 (900-2½)	1600-3 1206 (1300-3)	
IZKIP FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 13	740-½ 446 (500-1)	354 (400-½)	740-⅝ 786 (800-2¼)	354 (400-⅝)
CIRCLING	840-1 446 (500-1)	900-1 506 (600-1)	1180-2¼ 786 (800-2¼)	1600-3 1206 (1300-3)

ELEV 394

TDZE 386

REIL Rwy 24 and 31

HIRL Rwy 6-24 and 13-31

FAF to MAP 6.2 NM

Knots	60	90	120	150	180
Min:Sec	6:12	4:08	3:06	2:29	2:04