

WAAS CH 40399 W10A	APP CRS 095°	Rwy Ldg TDZE 1000 Apt Elev 1026
--	------------------------	---


RNAV (GPS) Y RWY 10
HARTSFIELD/JACKSON ATLANTA INTL (ATL)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME-0.3 RNP NA. For inop ALSF-2, increase LNAV/VNAV all Cats visibility to 1½ mile and LNAV Cats C and D visibility to 1¾ mile. LNAV procedure NA during simultaneous operations. Simultaneous approach authorized with Rwy 8L or 8R or 9L, or Rwy 8L and 9L. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct SCARR and hold.

D-ATIS 119.65	ATLANTA APP CON 134.725 379.9	ATLANTA TOWER 8L-26R 8R-26L 9L-27R 9R-27L 10-28 RWYS 119.1 125.325 123.85 119.3 119.5 254.4					GND CON 121.9	ALL RWYS 121.75 121.65 254.4
-------------------------	--	--	--	--	--	--	-------------------------	---

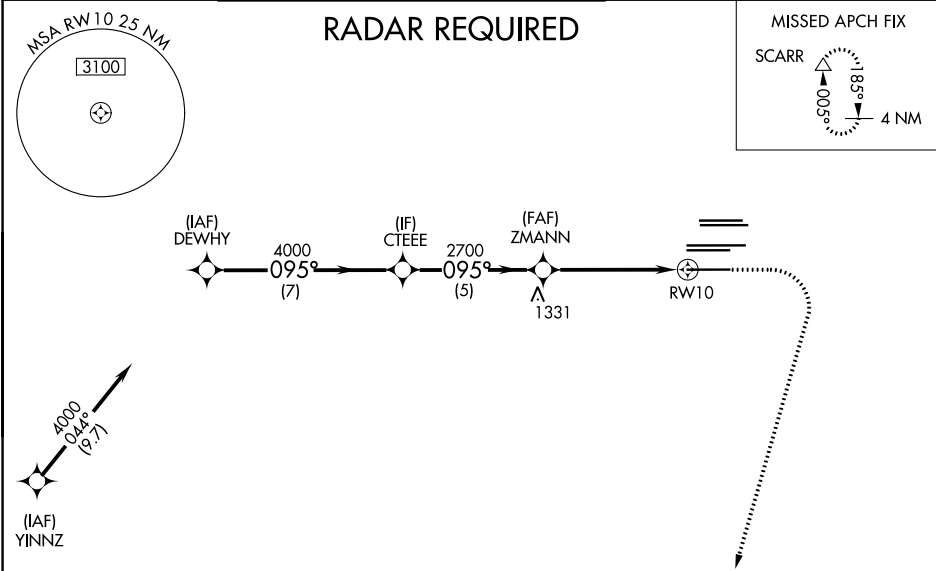

ELEV 1026 **D** TDZE 1000

CATEGORY	A	B	C	D
LPV DA	1200/18		200 (200-½)	
LNAV/VNAV DA	1455/55		455 (500-1)	
LNAV MDA	1480/24	480 (500-½)	1480/50	480 (500-1)

HIRL all Rwy's
TDZL/RCLS Rwy's 8L,
9R, 10, 26R, 27L and 28

SE-4, 09 JUL 2026 to 06 AUG 2026

SE-4, 09 JUL 2026 to 06 AUG 2026