

ATIS ★		DME required		[USAF]							
119.175	273.5			Rwy	Knots	60	120	180	240	300	360
CLNC DEL ★				03/21	V/V(fpm)	210	420	630	840	1050	1260
118.4	289.4			Minimum Climb Rate to 500							
GND CON ★											
124.35	335.8										
TOWER ★											
133.75	269.375										
ORLANDO DEP CON ★											
126.025	281.425										


TOP ALTITUDE

2000

ORMOND BEACH

112.6 OMN

Chan 73

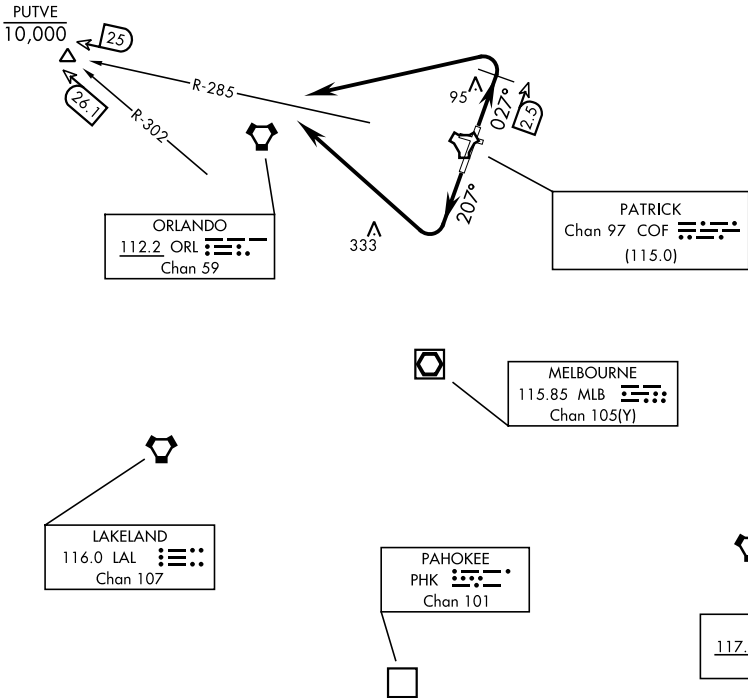

NOTE: Chart not to scale

DEPARTURE ROUTE DESCRIPTION

Expect clearance to filed altitude/flight level 10 minutes after departure.

TAKEOFF RWY 03: Climb on hdg 027° to COF TACAN 2.5 DME, then left turn to intercept COF R-285 to cross PUTVE (COF 25 DME/MLB VOR/DME 26.1 DME) at or below 10,000, maintain 2000 or higher as assigned.

TAKEOFF RWY 21: Climb on hdg 207°, then right turn to intercept COF TACAN R-285 to cross PUTVE (COF 25 DME/MLB VOR/DME 26.1 DME) at or below 10,000, maintain 2000 or higher as assigned.