
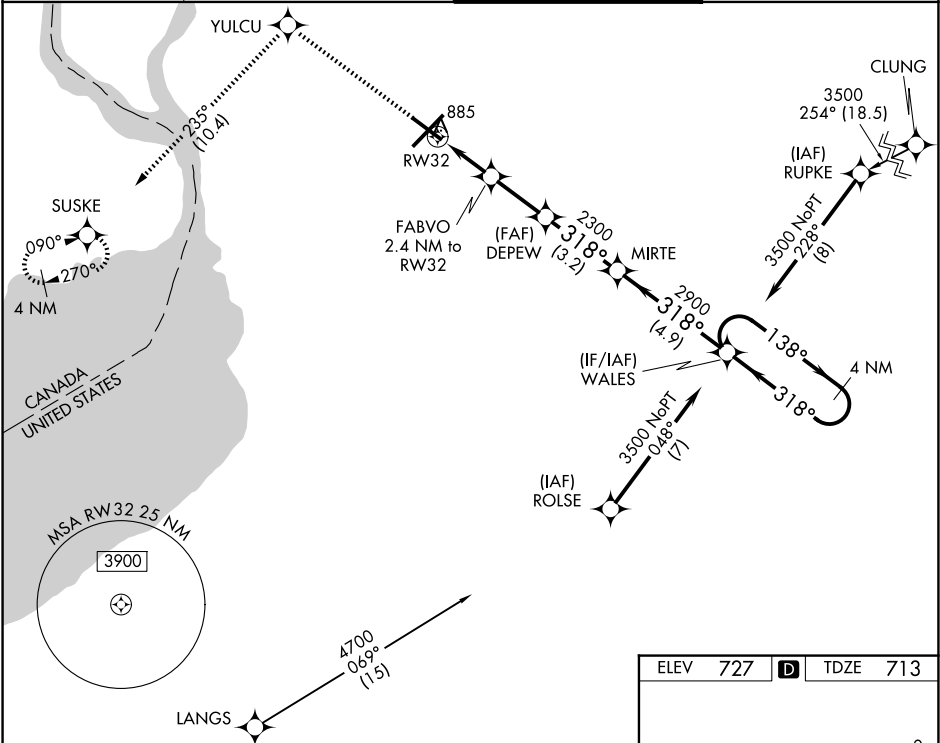


WAAS CH 81811 W32A	APP CRS 318°	Rwy Ldg TDZE Apt Elev 6121 713 727
--	------------------------	--

RNAV (GPS) RWY 32
BUFFALO NIAGARA INTL (BUF')

RNP APCH - GPS	MALSR	MISSED APPROACH: Climb to 3000 direct YULCU on track 235° to SUSKE and hold.
For uncompensated Baro-VNAV systems LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility all Cats to 1 SM. Inop table does not apply to LPV all Cats.		
D-ATIS 135.35	BUFFALO APP CON 126.15 263.125	BUFFALO TOWER 120.5 257.8
		GND CON 133.2 257.8

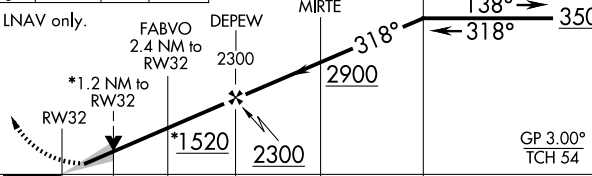

3000	YULCU	tr 235°	SUSKE								
				4 NM Holding Pattern							
* LNAV only.											
											
CATEGORY				A		B		C		D	
LPV DA				913-1½		200 (200-½)					
LNAV/ VNAV DA				1092-5⁄8		379 (400-5⁄8)					
LNAV MDA				1140-½ 427 (500-½)		1140-¾ 427 (500-¾)					
CIRCLING				1200-1 473 (500-1)		1220-1½ 493 (500-1½)		1340-2 613 (700-2)			

