


LOC/DME I-VGU	APP CRS	Rwy Ldg	9001
111.9	131°	TDZE	922
Chan 56		Apt Elev	958


ILS or LOC RWY 13
DES MOINES INTL (DSM)

▼ DME required. For inop ALS, increase S-LOC 13 Cats C/D visibility to RVR 4500. ▲ #RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR AS	MISSED APPROACH: Climb to 1600 then climbing right turn to 3000 direct DSM VORTAC then on DSM VORTAC R-254 to MIDDLE INT/DSM 12 DME and hold.
--	------------------------	--

ATIS 119.55	DES MOINES APP CON 123.9 307.15	DES MOINES TOWER 118.3 257.8	GND CON 121.9 348.6
----------------	------------------------------------	---------------------------------	------------------------

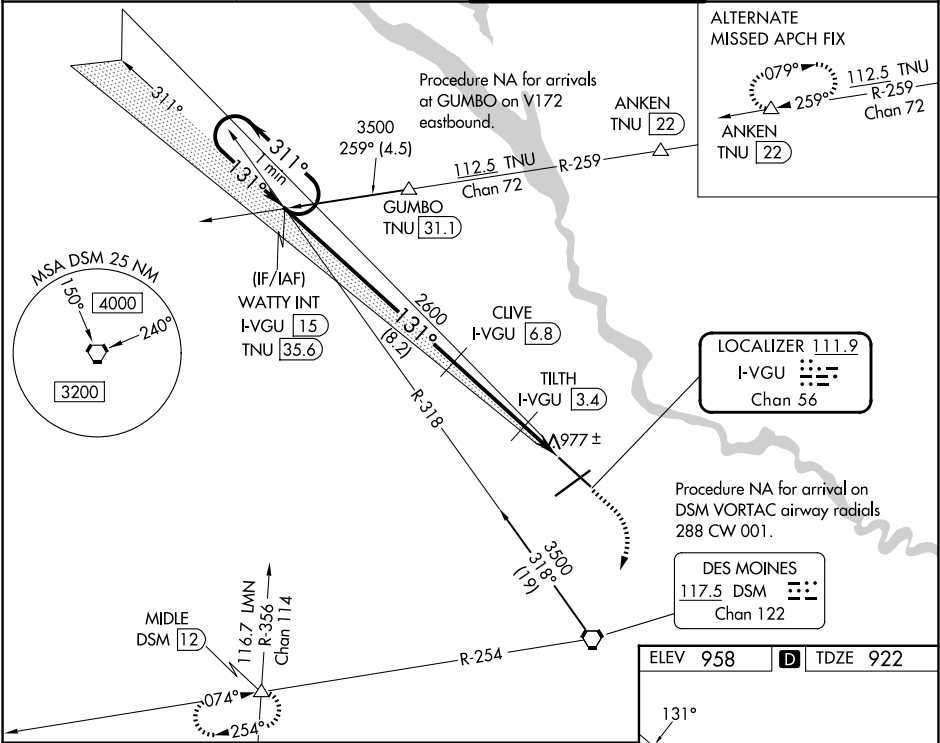

One Minute Holding Pattern	WATTY INT I-VGU 15				1600	3000	DSM	DSM R-254	MIDDLE
					CLIVE I-VGU 6.8	TILTH I-VGU 3.4			*LOC only
							*I-VGU 2.5	I-VGU 1.7	
3500 ← 311° 131° →					2600	*1440			
GS 3.00° TCH 56									
	8.2 NM				3.4 NM	0.9 NM	0.9 NM		
CATEGORY	A		B		C		D		
S-ILS 13#	1122/24 200 (200-½)								
S-LOC 13	1240/24 318 (300-½)								
CIRCLING	1420-1		462 (500-1)		1600-1¾ 642 (700-1¾)		1760-2½ 802 (900-2½)		

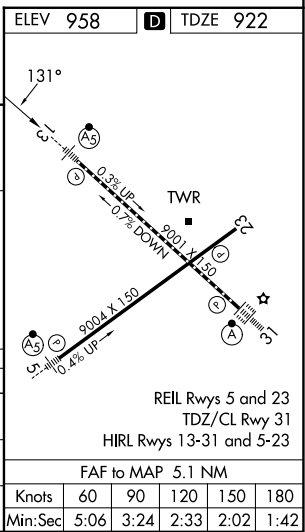

NC-3, 09 JUL 2026 to 06 AUG 2026

NC-3, 09 JUL 2026 to 06 AUG 2026