

LOC/DME I-DTW

110.7

APP CRS

036°

Rwy Ldg

11494

TDZE

640

Chan

44

Apt Elev

645

ILS or LOC RWY 4R

DETROIT METRO WAYNE COUNTY (DTW)

RNAV 1-GPS.
CLEVR, CAATZ and ELDNN: RNAV 1-DME/DME/IRU or GPS required.
Aircraft not DME/DME/IRU or GPS equipped - RADAR required for procedure entry.
DME or RADAR required.

Simultaneous approach authorized. For inop ALS, increase S-LOC 4R
Cat C/D visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 4000 on DXO VOR/DME R-035 to LUPAY/DXO VOR/DME/15.6 DME and hold.

D-ATIS

133.675

DETROIT APP CON

124.05 284.0

METRO TOWER

128.125 317.725

GND CON

121.8 (NW) 119.45 (NE)
132.725 (SW) 119.25 (SE)

ALTERNATE MISSED APCH FIX

PERLS SVM 17.9

LOCALIZER 110.7 I-DTW Chan 44

DXO R-035

784


IM

ETALE I-DTW 6.2 RADAR

DETROIT 113.4 DXO Chan 81

MISSED APCH FIX

LUPAY DXO 15.6

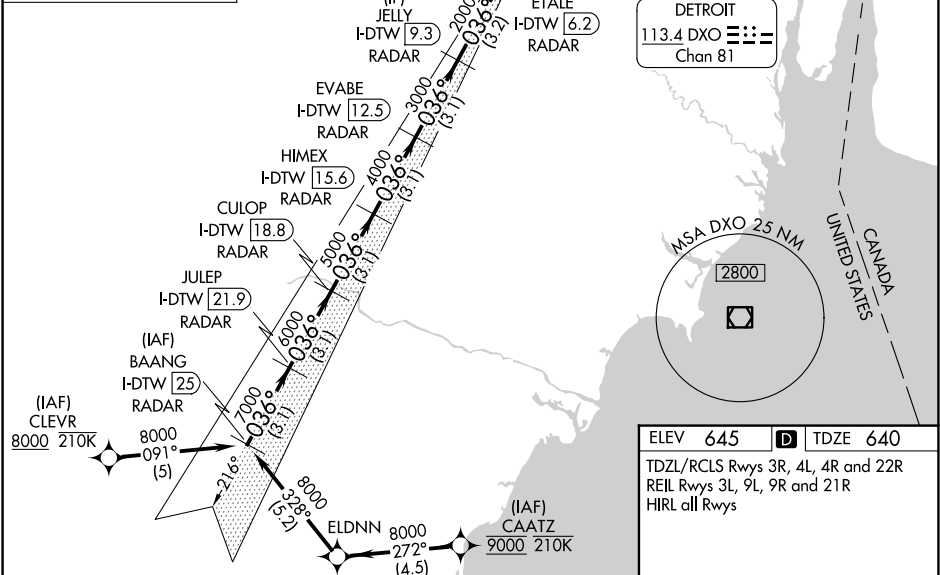

CATEGORY	A	B	C	D
S-ILS 4R	840/18	200 (200-1/2)		
S-LOC 4R	1040/24	400 (400-1/2)	1040/35	400 (400-5/8)
CIRCLING	1180-1	535 (600-1)	1180-1 1/2 535 (600-1 1/2)	1240-2 595 (600-2)

