

WAAS CH 86220 W27A	APP CRS 276°	Rwy Ldg 8708 TDZE 635 Apt Elev 645
--	------------------------	---

RNAV (GPS) RWY 27R

DETROIT METRO WAYNE COUNTY (DTW)


RNP APCH

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). For inop ALS, increase LNAV Cat C and D visibility to RVR 6000. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. ** RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct KUPNE and hold, continue climb-in-hold to 4000.

D-ATIS 133.675	DETROIT APP CON 125.15 284.0	METRO TOWER 118.4 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)
--------------------------	--	-------------------------------------	---

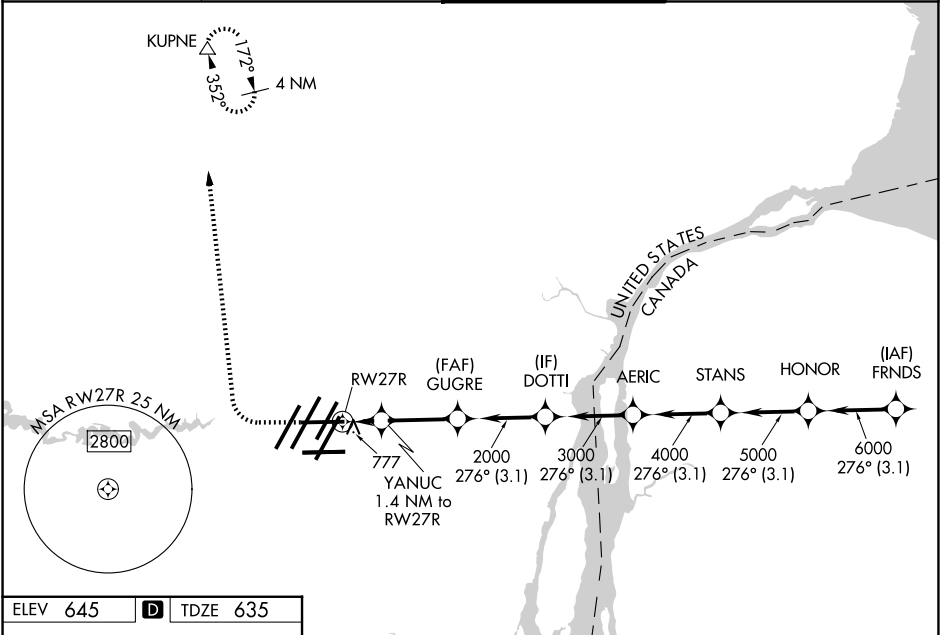

ELEV 645	D	TDZE 635
-----------------	----------	-----------------

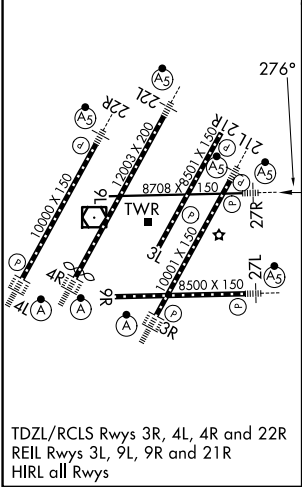

1100	4000	KUPNE	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 61).						
									
*LNAV only.			YANUC 1.4 NM to RW27R	GUGRE	DOTTI	AERIC	STANS	HONOR	FRNDS
				2000		3000	4000	5000	276° 6000
			RW27R	1120*	2000				
			1.4 NM	2.7 NM	3.1	3.1	3.1	3.1	3.1 NM
CATEGORY			A		B		C		D
LPV DA**			835/24		200 (200-½)				
LNAV/ VNAV DA			938/24		303 (300-½)				
LNAV MDA			1040/24 405 (400-½)		1040/40		405 (400-¾)		
CIRCLING			1180-1 535 (600-1)		1180-1½ 535 (600-1½)		1240-2 595 (600-2)		

EC-1, 09 JUL 2026 to 06 AUG 2026

EC-1, 09 JUL 2026 to 06 AUG 2026