


APP CRS	Rwy Ldg	9025
085°	TDZE	3940
	Apt Elev	3962


RNAV (RNP) Y RWY 8R

EL PASO INTL (ELP)

RNP AR APCH. RF required.	MISSED APPROACH: Climb to 4400 then climbing right turn to 7500 direct FABAN and hold.
ASR For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.	

D-ATIS 120.0 254.3	EL PASO APP CON 124.25 298.85	EL PASO TOWER 118.3 239.275	GND CON 121.9 348.6
-----------------------	----------------------------------	--------------------------------	------------------------

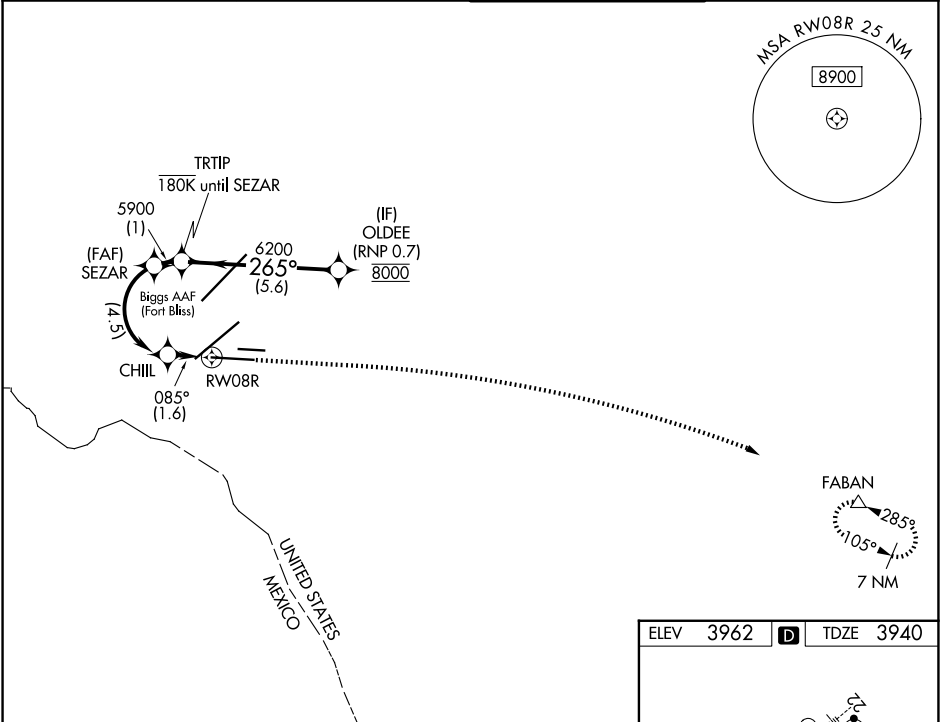

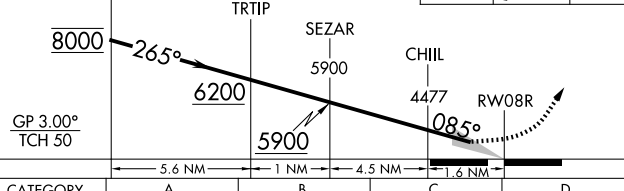VGS and RNAV glidepath not coincident (VGS Angle 3.00/TCH 75).					4400 ↑		7500 		FABAN 		
											
CATEGORY	A			B		C		D			
RNP 0.20 DA	4193- ³ / ₄			253 (300- ³ / ₄)							
RNP 0.30 DA	4234- ⁷ / ₈			294 (300- ⁷ / ₈)							
AUTHORIZATION REQUIRED											

