


LOC/DME I-FAR	APP CRS	Rwy Ldg	9001
110.3	356°	TDZE	899
Chan 40		Apt Elev	901


ILS or LOC RWY 36
HECTOR INTL (FAR)

ADF or DME required for procedure entry. ADF or DME required.	MALSR	MISSED APPROACH: Climb to 2500 direct KENIE LOM and hold (DME aircraft climb to 4000 on FAR VOR/DME R-358 to GORGY/22 DME and hold N, RT, 178° inbound, continue climb-in-hold to 4000).
For inop ALS increase S-ILS 36 Cat E visibility to RVR 4000 and S-LOC 36 Cat C/D/E visibility to 1 3/8 SM. # RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS	FARGO APP CON	FARGO TOWER	GND CON
124.5 379.2	120.4 377.15	133.8 290.4	121.9 348.6

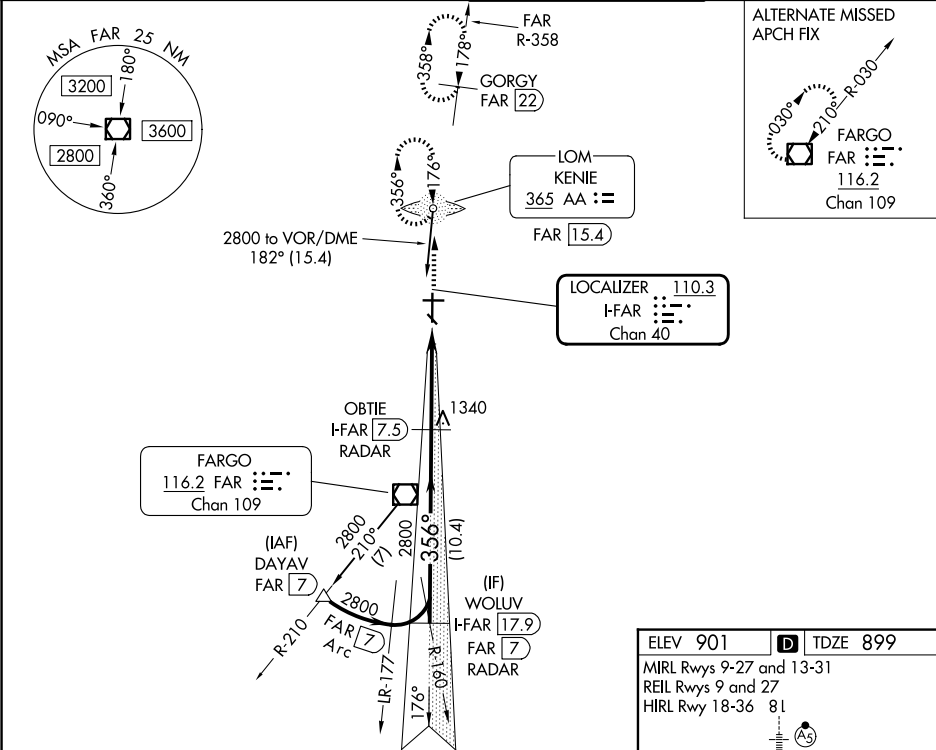

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).					2500	AA
WOLUV I-FAR 17.9 RADAR					Use I-FAR DME when on the localizer course.	
OBTIE I-FAR 7.5 RADAR					* I-FAR 3	
2800					* LOC only	
GS 3.00° TCH 55					I-FAR 1.7	
10.4 NM					4.6 NM	
CATEGORY					1.2 NM	
S-ILS 36#					200 (200-1/2)	
S-LOC 36					1360/24 461 (500-1/2)	
CIRCLING					1380-1 479 (500-1)	
					1520-1 3/4 619 (700-1 3/4)	
					1620-2 1/4 719 (800-2 1/4)	
					1620-2 1/2 719 (800-2 1/2)	

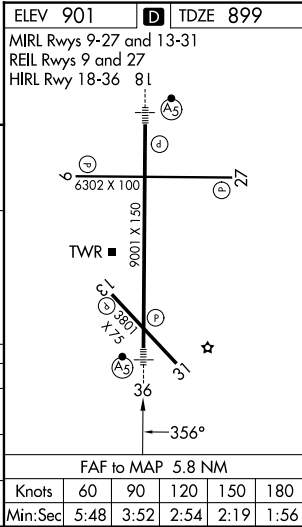

NC-1, 09 JUL 2026 to 06 AUG 2026

NC-1, 09 JUL 2026 to 06 AUG 2026