

WAAS CH 70710 W09A	APP CRS 092°	Rwy Ldg TDZE 147 Apt Elev 147	6502
--	------------------------	---	-------------

RNAV (GPS) RWY 9

FLORENCE RGNL (F'L.O)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Circling Rwy 1, 19 NA at night.

MALSR

MISSED APPROACH: Climb to 2000 direct ESVAC and hold.

ATIS 123.625	FLORENCE APP CON★ 118.6 341.7 (256°-074°) 135.25 316.15 (075°-255°)	FLORENCE TOWER★ 125.1 (CTAF) 0 353.85	GND CON 121.9 353.85	UNICOM 122.95
------------------------	---	--	--------------------------------	-------------------------

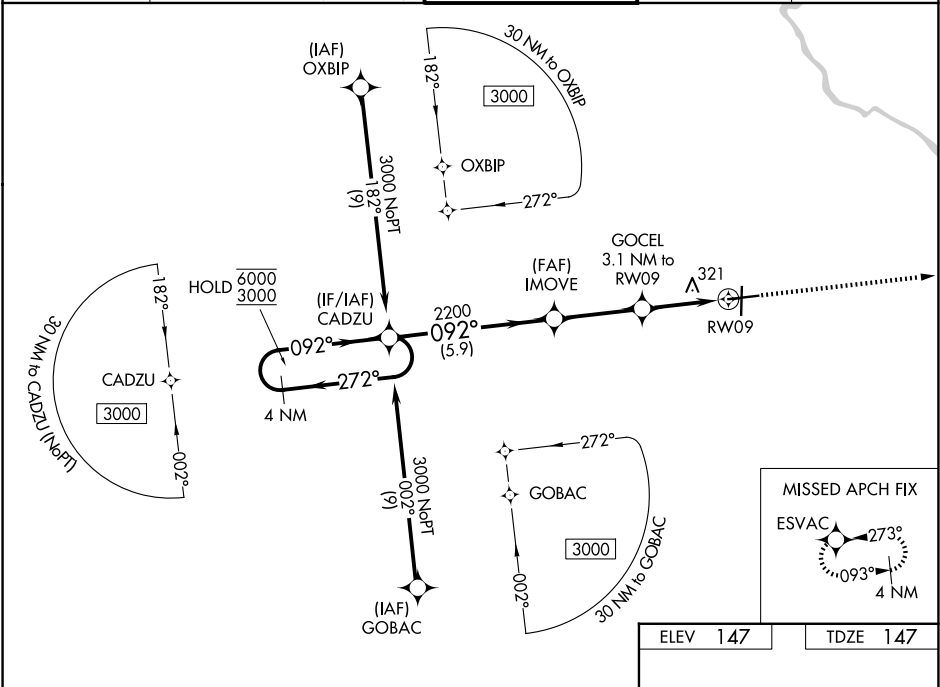

4 NM Holding Pattern

CADZU

6000 ← 272°
3000 → 092°

GP 3.00°
TCH 59

2000

ESVAC

IMOVE

GOCEL 3.1 NM to RWY 09

1.2 NM to RWY 09

RWY 09

5.9 NM

3.2 NM

1.9 NM

1.2 NM

2200

1180

CATEGORY	A	B	C	D
LPV DA		347-½	200 (200-½)	
LNAV/VNAV DA		603-¾	456 (500-¾)	
LNAV MDA	580-½	433 (500-½)	580-¾	433 (500-¾)
CIRCLING	640-1 493 (500-1)	660-1 513 (600-1)	900-2¼ 753 (800-2¼)	900-2½ 753 (800-2½)

TWR

61

6

0.4% UP

0.5% UP

1

6000 X 150

6502 X 150

092°

REIL Rwy 1, 19 and 27 **1**
HIRL Rwy 9-27 **1**
MIRL Rwy 1-19