

WAAS CH 69599 W23A	APP CRS 230°	Rwy Ldg 11981 TDZE 799 Apt Elev 815
--	------------------------	--

RNAV (GPS) RWY 23

FORT WAYNE INTL (FWA)


⚠

ASR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct EBACO and hold.

ATIS 121.25 360.825	FORT WAYNE APP CON 127.2 284.6	FORT WAYNE TOWER 119.1 269.325	GND CON 121.9 348.6
-------------------------------	--	--	-------------------------------

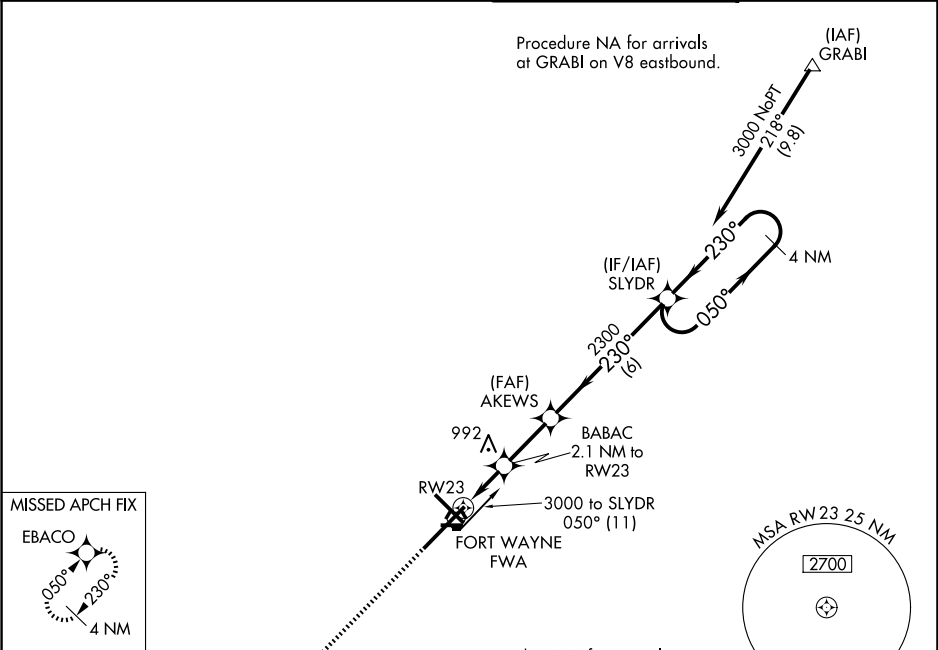

ELEV 815	D	TDZE 799
-----------------	----------	-----------------

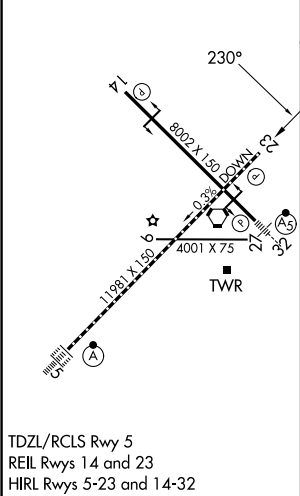

TDZL/RCLS Rwy 5
REIL Rwys 14 and 23
HIRL Rwys 5-23 and 14-32

3000 EBACO		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 76).			
*LNAV only.		BABAC 2.1 NM to RW23	AKEWS 2300	SLYDR 4 NM Holding Pattern	3000
RW23		*1.3 NM to RW23	*1520	2300	GP 3.00° TCH 55
1.3		0.8	2.4 NM	6 NM	
CATEGORY	A	B	C	D	E
LPV DA	1053/40 254 (300-¾)				
LNAV/VNAV DA	1230-1⅜ 431 (500-1⅝)				
LNAV MDA	1300/55 501 (500-1)		1300-1⅜ 501 (500-1⅝)		
CIRCLING	1300-1 485 (500-1)		1420-1¾ 605 (700-1¾)	1520-2¼ 705 (800-2¼)	1520-2½ 705 (800-2½)