

WAAS CH 82539 W27A	APP CRS 272°	Rwy Ldg TDZE 629 Apt Elev 631
--	------------------------	---

AL-183 (FAA)


RNAV (GPS) RWY 27
GREENWOOD COUNTY (GRD)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Laurens altimeter setting. DME/DME RNP-0.3 NA. Circling Rwy 5, 23 NA at night. Rwy 27 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Laurens altimeter setting: increase LPV DA to 932 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 936 feet and all visibilities ½ SM; increase all MDA 60 feet and LNAV visibility Cats C and D ½ SM and Circling visibility Cats C and D ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ SM and LNAV all Cats visibility to 1 SM. For inop ALS when using Laurens altimeter setting, increase LPV and LNAV/VNAV all Cats and LNAV Cats A and B visibility to 1 SM and LNAV Cats C and D visibility to 1½ SM.




MISSED APPROACH:
Climb to 2500 direct
MACER and hold.

ASOS 121.125	GREER APP CON ★ 120,6 350,2	UNICOM 122.975 (CTAF) 0
------------------------	---------------------------------------	--

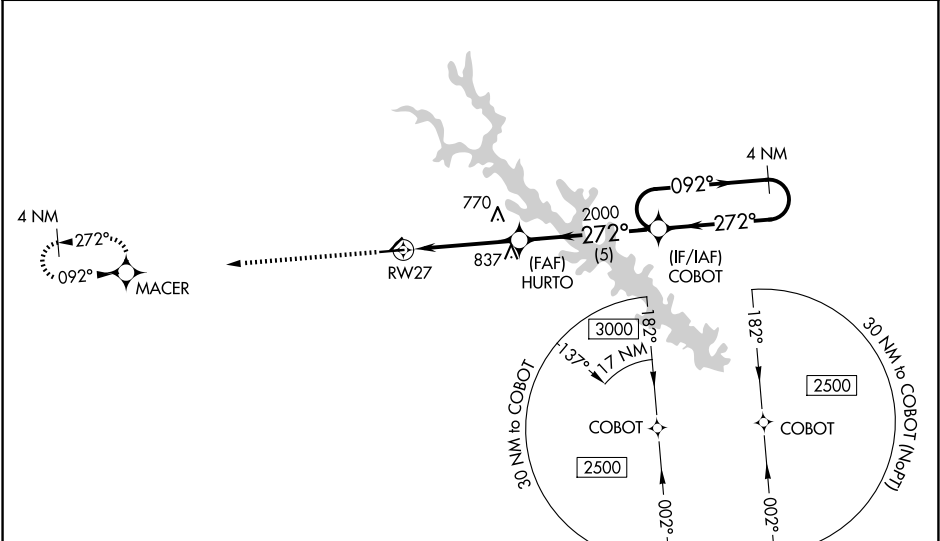

ELEV 631	TDZE 629
-----------------	-----------------

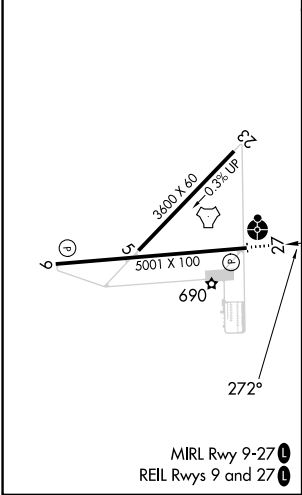

2500	MACER			
*LNAV only.	HURTO	2000	272°	092°
*1 NM to RW27	2000	272°	2500	GP 3.00° TCH 53
1 NM	3.2 NM	5 NM		
CATEGORY	A	B	C	D
LPV DA	879-¾	250 (300-¾)		
LNAV/VNAV DA	883-¾	254 (300-¾)		
LNAV MDA	980-¾ 351 (400-¾)	980-⅞ 351 (400-⅞)		
CIRCLING	1080-1 449 (500-1)	1100-1 469 (500-1)	1320-2 689 (700-2)	1340-2¼ 709 (800-2¼)

SE-2, 09 JUL 2026 to 06 AUG 2026

SE-2, 09 JUL 2026 to 06 AUG 2026