


WAAS CH 48899 W25A	APP CRS 252°	Rwy Ldg TDZE 678 Apt Elev 683	10599 678 683
--	------------------------	---	--

RNAV (GPS) RWY 25


EUGENE F KRANZ TOLEDO EXPRESS (TOL)

RNP APCH.	<p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 52°C. For inoperative ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1½ SM, LNAV Cat D/E visibility to RVR 6000. ** RVR 1800 authorized with the use of FD or AP or HUD to DA.</p>	MALSR 	MISSED APPROACH: Climb to 3000 direct ATVIY and hold.
-----------	---	-----------	--

ATIS 118.75 290.225	TOLEDO APP CON 134.35 317.55	TOLEDO TOWER 118.1 285.4	GND CON 121.9 348.6
-------------------------------	--	------------------------------------	-------------------------------

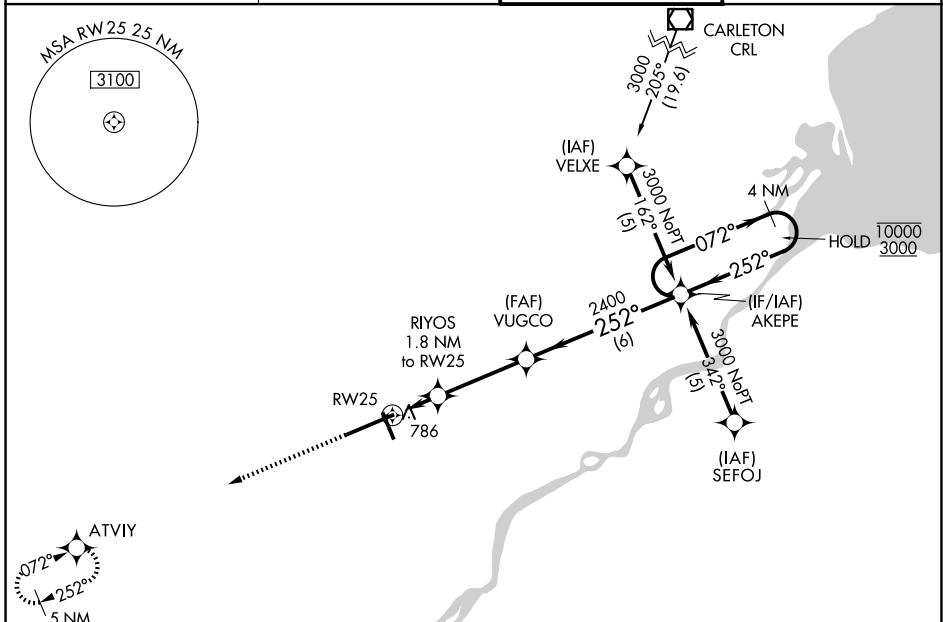

ELEV 683	D	TDZE 678
----------	----------	----------

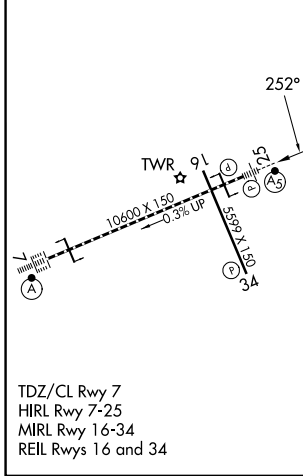

CATEGORY	A	B	C	D	E
LPV DA**	878/24 200 (200-½)				
LNAV/VNAV DA	1065/50 387 (400-1)				
LNAV MDA	1040/24 362 (400-½)		1040/50 362 (400-1)		
CIRCLING	1200-1 517 (600-1)	1300-1¾ 617 (700-1¾)	1360-2¼ 677 (700-2¼)	1360-2½	677 (700-2½)