



LOC/DME I-PRQ	APP CRS	Rwy Ldg
111.3	131°	6568
Chan 50		TDZE 46
		Apt Elev 46

ILS or LOC RWY 13R

WILLIAM P HOBBY (HOU)

RADAR or DME required for LOC only. RADAR required for procedure entry.	MALSR 	MISSED APPROACH: Climb to 800 then climbing right turn to 2200 direct VUH VOR/DME.
Inop table does not apply to S-ILS Rwy 13R. Rwy 13R helicopter visibility reduction below 3/4 SM NA. For inop ALS, increase S-LOC 13R Cats A/B visibility to RVR 5500, Cats C/D/E to 13/4 SM.		

D-ATIS 124.6	HOUSTON APP CON 120.05 379.1 (E) 124.35 316.15 (W)	HOBBY TOWER 118.7 256.9	GND CON 121.9
------------------------	--	-----------------------------------	-------------------------

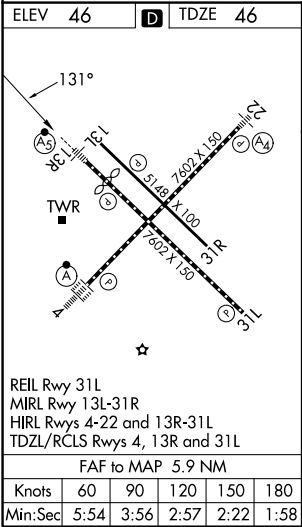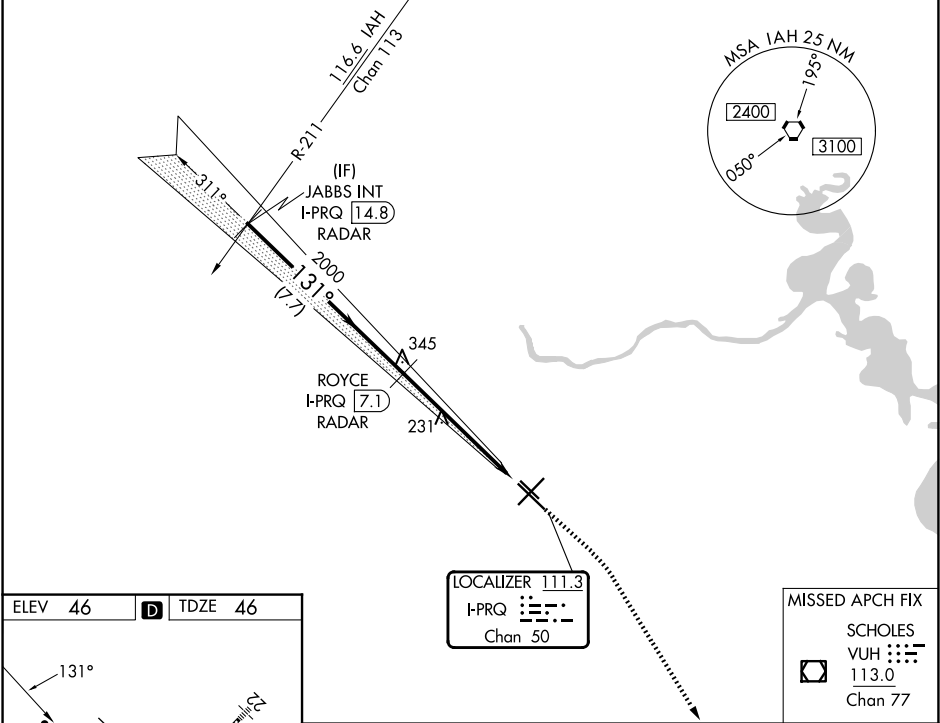

	JABBS INT I-PRQ 14.8 RADAR	ROYCE I-PRQ 7.1 RADAR	800	2200	VUH
			* I-PRQ 2.6	* LOC only	I-PRQ 1.3
GS 3.00° TCH 49	2000	2000	2000	2000	2000
	7.7 NM	4.5 NM	1.4 NM		
CATEGORY	A	B	C	D	E
S-ILS 13R	296/40 250 (300-3/4)				
S-LOC 13R	540/40	494 (500-3/4)	540/50	494 (500-1)	540/60 494 (500-1 1/4)
CIRCLING	540-1	494 (500-1)	740-2 1/4	694 (700-2 1/4)	860-3 814 (900-3)