

WAAS CH 50306 W05B	APP CRS 050°	Rwy Ldg 10000 TDZE 791 Apt Elev 796
--	------------------------	--

RNAV (GPS) Y RWY 5R

INDIANAPOLIS INTL (IND)

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized. LNAV

▲


procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


ALSIF-2

MISSED APPROACH:

Climb to 1500 then climbing right turn to 3000 direct OZMOE and hold.

D-ATIS 134.25	INDIANAPOLIS APP CON 128.175 317.8	INDY TOWER 120.9 251.1	GND CON 121.9	CLNC DEL 128.75 251.1	CPDLC
-------------------------	--	----------------------------------	-------------------------	---------------------------------	-------

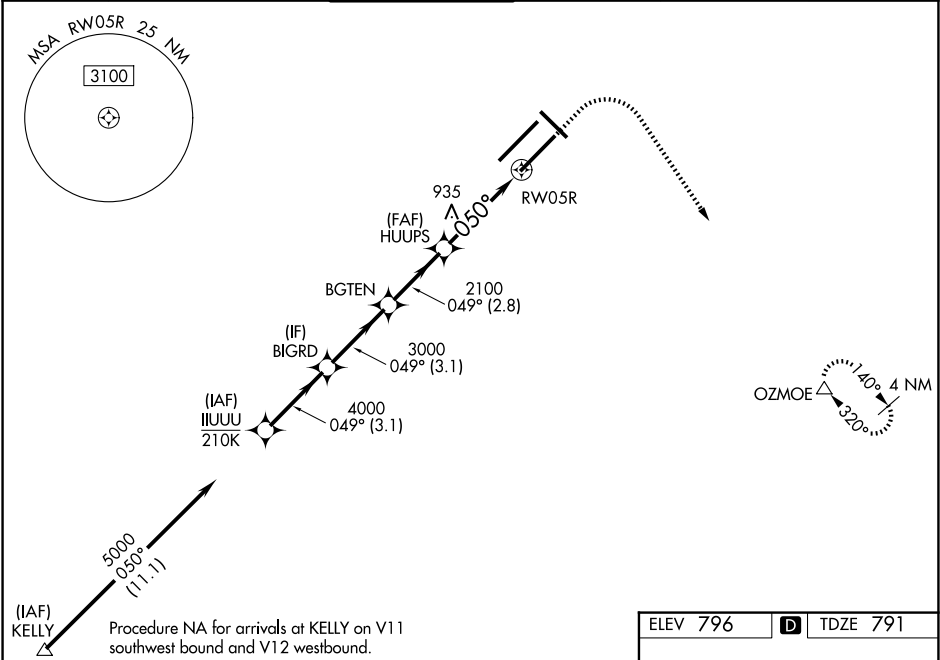

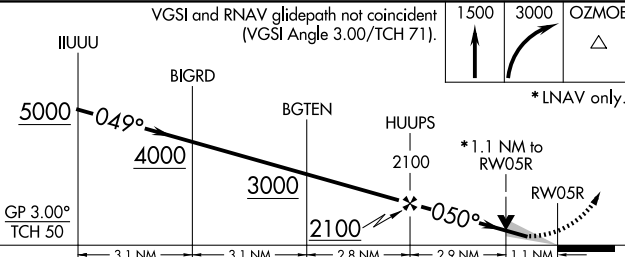VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 71).					1500 ↑	3000 	OZMOE △
					*LNAV only.		
CATEGORY	A		B	C	D		
LPV DA	991/18		200 (200-½)				
LNAV/VNAV DA	1172/40		381 (400-¾)				
LNAV MDA	1220/24	429 (500-½)		1220/40	429 (500-¾)		
CIRCLING	1420-1	624 (700-1)		1420-1¾ 624 (700-1¾)	1560-2½ 764 (800-2½)		

