

LOC/DME I-AAAY	APP CRS	Rwy Ldg
110.3	227°	8273
Chan 40		TDZE 262
		Apt Elev 266

ILS or LOC RWY 22R


BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

Simultaneous approach authorized. For inop ALS, increase S-LOC 22R Cat C/D visibility to 1½ SM; increase GOHKO Fix Minimums (DME required) S-LOC 22R Cat C/D visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 on LIT VORTAC R-247 to BEGAN INT/LIT 28.7 DME and hold.

D-ATIS	LITTLE ROCK APP CON	ADAMS TOWER	GND CON
125.65	135.4 353.6	118.7 257.8	121.9 339.8

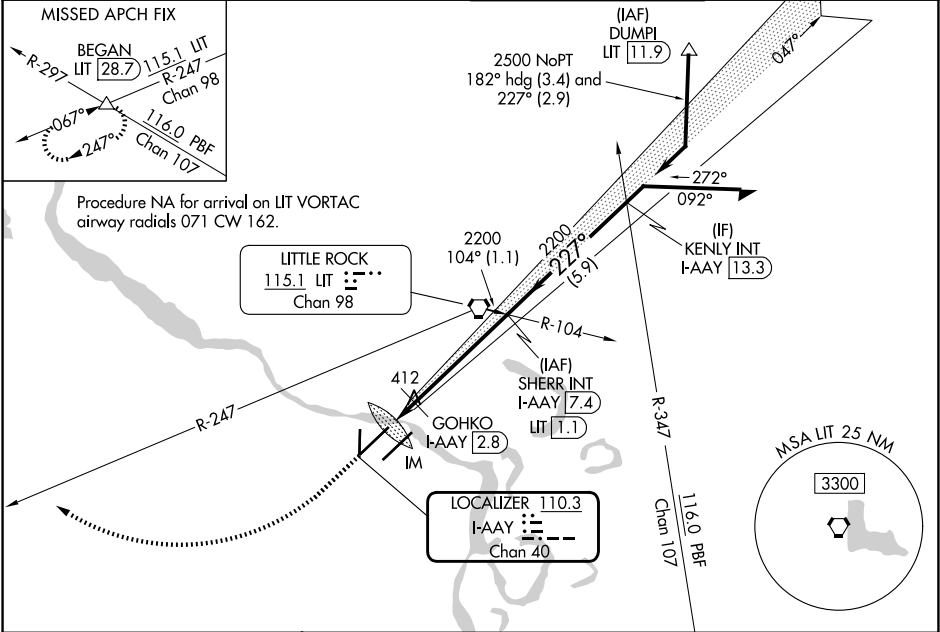

ELEV 266	D	TDZE 262	1000	3000	BEGAN	SHERR INT	I-AAAY 7.4	LIT 1.1	Remain within 10 NM
			↑	LIT R-247	△				
			Use I-AAAY DME when on the localizer course.						
81 6224 X 150 36 227° 8273 150 40 8251 X 150 40 TWR			IM I-AAAY 1.5 GOHKO I-AAAY 2.8 740 2200 047° 227° 2200 GS 3.00° TCH 59						
			0.1 1.2 NM 4.6 NM						
			CATEGORY		A	B	C	D	
			S-ILS 22R		462/18 200 (200-½)				
			S-LOC 22R		740/24 478 (500-½)		740/50 478 (500-1)		
			CIRCLING		820-1 554 (600-1)		1000-1 734 (800-1)		1180-2¾ 914 (1000-2¾) 1180-3 914 (1000-3)
			GOHKO FIX MINIMUMS (DME REQUIRED)						
			S-LOC 22R		680/24 418 (500-½)		680/40 418 (500-¾)		
			CIRCLING		820-1 554 (600-1)		1000-1 734 (800-1)		1180-2¾ 914 (1000-2¾) 1180-3 914 (1000-3)