

FLMGO TWO DEPARTURE(RNAV) Departure Routes

AL-257 (FAA)

MIAMI INTL (MIA)
MIAMI, FLORIDA

See following page
for transition routes

△ FLMGO

TOP ALTITUDE:
5000

MIAMI DEP CON	
126.85	290.325
D-ATIS	
	133.675
CLNC DEL	
	135.35
CPDLC	
GND CON	
(8L/R, 12, 26L/R)	
348.6	(9, 27, 30)
MIAMI TOWER	
118.3	256.9

TAKEOFF MINIMUMS


Rwy 8L: Standard with minimum climb of 500'/NM to 520, then minimum climb of 215' to 1400.

Rwy 8R: Standard with minimum climb of 500'/NM to 520, then minimum climb of 235' to 1400.

Rwy 9: Standard with minimum climb of 500' /NM to 520, then minimum climb of 240' to 1400.

Rwy 12: Standard wth minimum climb
of 500'/NM to 520, then
minimum climb of 230' to 1400.

Rwys 26L/R, 27, 30: Standard with minimum climb of 500'/NM to 520.



RNAV 1 - DME/DME/IRU or GPS.

RADAR required.


NOTE: Jet aircraft only.

NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.

NOTE: WAPOM Transition ATC assigned except aircraft landing: MCO, DAB, and MLB terminal areas.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)


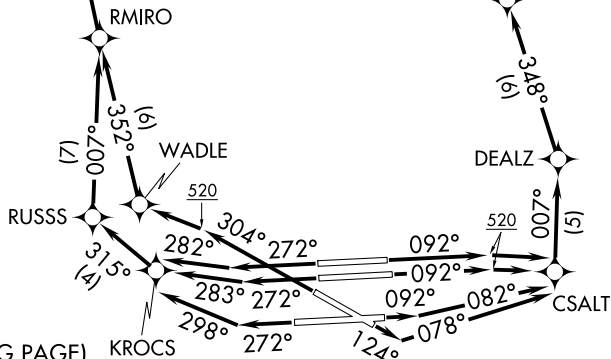


FLMGO TWO DEPARTURE(RNAV) Departure Routes

(FLMGO2.FLMGO) 21MAR24

MIAMI, FLORIDA
MIAMI INTL (MIA)

SE-3, 09 JUL 2026 to 06 AUG 2026

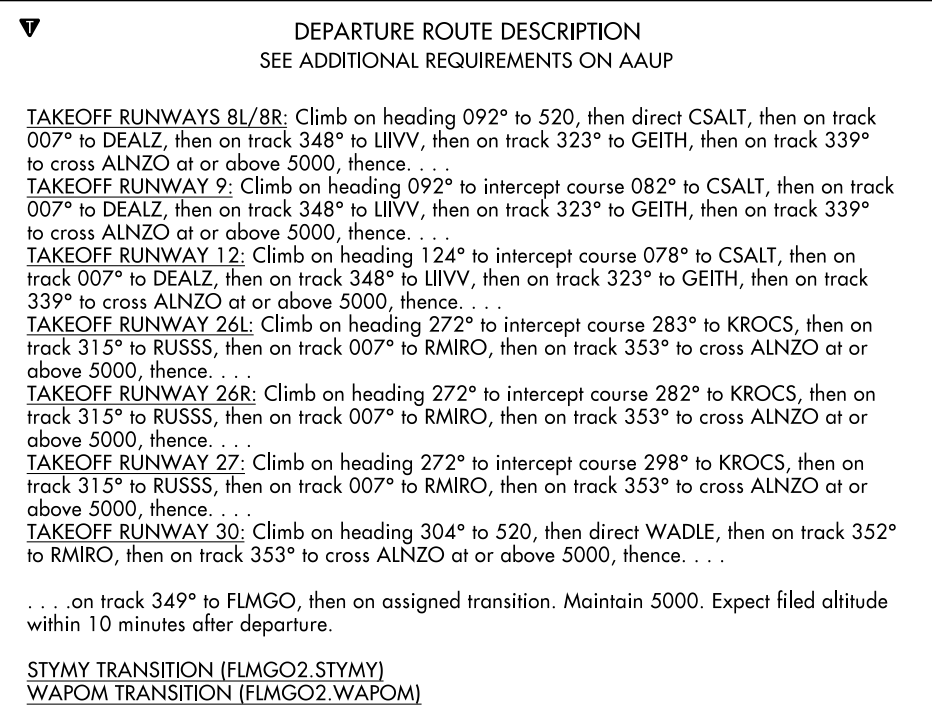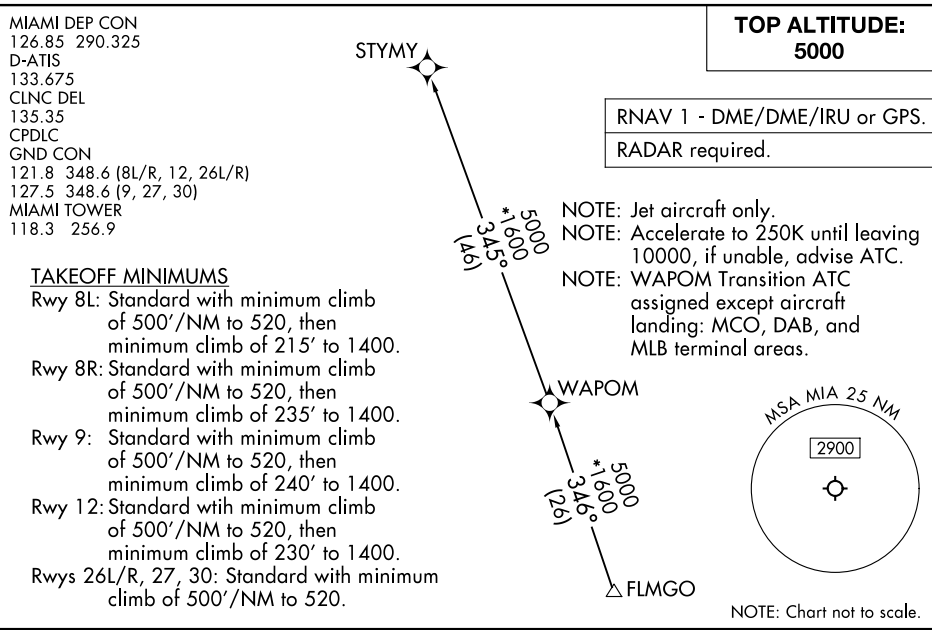

SE-3, 09 JUL 2026 to 06 AUG 2026

SE-3, 09 JUL 2026 to 06 AUG 2026