

MIAMI, FLORIDA

AL-257 (FAA)


26022

APP CRS	Rwy Ldg	7913
305°	TDZE	8
	Apt Elev	9

RNAV (RNP) Y RWY 30
MIAMI INTL (MIA)

V NA	For inoperative MALS, increase RNP 0.23 all Cats visibility to 1½, RNP 0.30 all Cats to 1¾. GPS Required. For uncompensated Baro-VNAV systems, procedure NA below 6°C (42°F) or above 48°C (119°F).	MALS 	MISSED APPROACH: Climb to 3000 direct VEPCO and via 342° track to BRBRA and hold.
-----------------------	--	---	---

D-ATIS 119.15	MIAMI APP CON 124.85 322.3	MIAMI TOWER 118.3 256.9	GND CON 121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30) 348.6
-------------------------	--------------------------------------	-----------------------------------	--

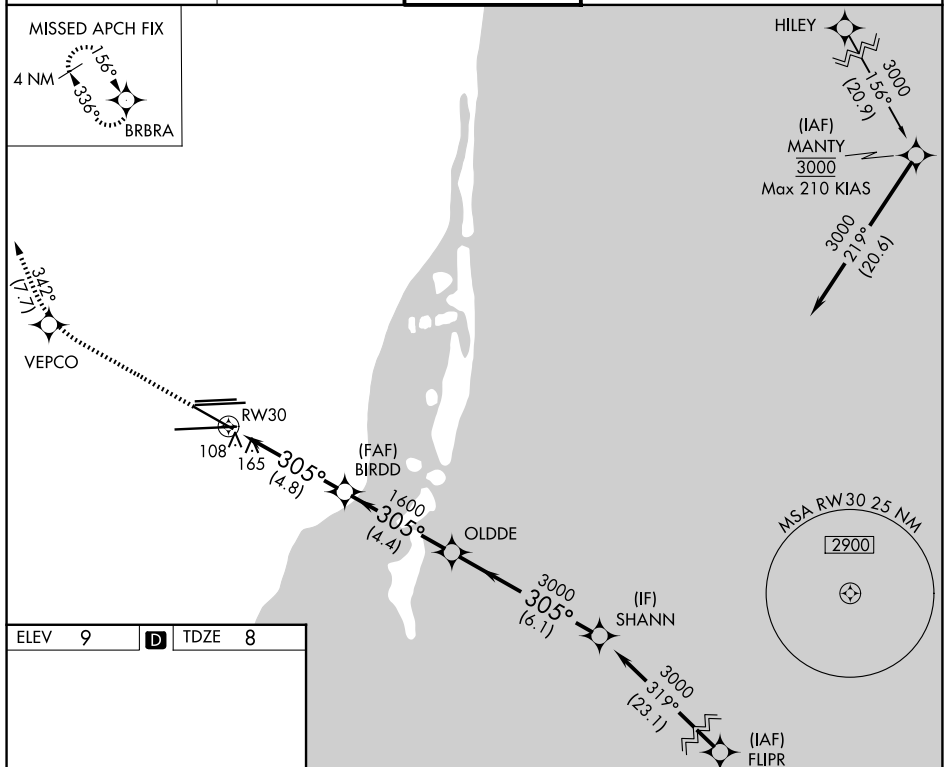

CATEGORY	A	B	C	D
RNP 0.23 DA		426-1¼	418 (500-1¼)	
RNP 0.30 DA		521-1½	513 (600-1½)	

AUTHORIZATION REQUIRED

MIAMI, FLORIDA
Orig-A 30JUN11

25°48'N-80°17'W

MIAMI INTL (MIA)

RNAV (RNP) Y RWY 30

SE-3, 09 JUL 2026 to 06 AUG 2026