


WAAS CH 40313 W01B	APP CRS 006°	Rwy Ldg TDZE 17 Apt Elev 36
--	------------------------	---

RNAV (GPS) Z RWY 1L

NAPA COUNTY (APC)


RNP APCH - GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. Inop table does not apply to LPV minimums. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM.	MALS A4	MISSED APPROACH: Climb to 5000 direct CIVDA and on track 326° to POPES and hold. Missed approach requires minimum climb of 420 feet per NM to 2200; if unable to meet climb gradient, see RNAV (GPS) Y RWY 1L.
--	---	--

ATIS 124.05	OAKLAND CENTER 127.8 353.5	NAPA TOWER★ 118.70 (CTAF) 257.8	GND CON 121.7	UNICOM 122.95
-----------------------	--------------------------------------	---	-------------------------	-------------------------

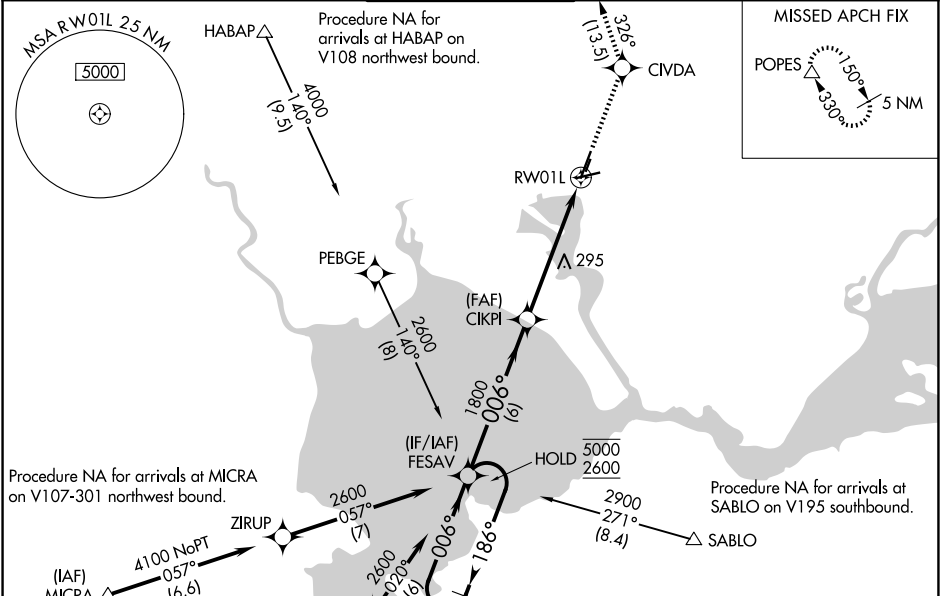

ELEV 36	TDZE 17
REIL Rwy 6 1	
MIRL Rwys 6-24 and 1L-19R 1	

4 NM Holding Pattern		FESAV	5000 CIVDA	tr 326°	POPES
5000 ← 186°		1800	1.6 NM to RWY 01L		
2600 → 006°		1800			
GP 3.00° TCH 50		1800			
		6 NM	3.9 NM	1.6 NM	
CATEGORY	A	B	C	D	
LPV DA		217-¾ 200 (200-¾)			
LNAV/VNAV DA		330-¾ 313 (300-¾)			
LNAV MDA	560-¾ 543 (600-¾)		560-1¾ 543 (600-1¾)		

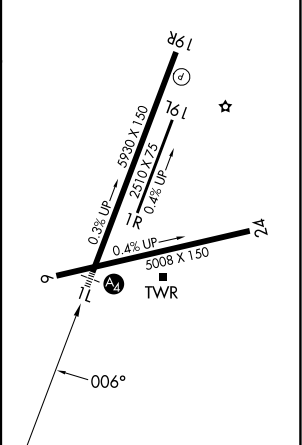

SW-2, 09 JUL 2026 to 06 AUG 2026

SW-2, 09 JUL 2026 to 06 AUG 2026