




APP CRS	Rwy Ldg	6501
288°	TDZE	10
	Apt Elev	18

RNAV (GPS) W RWY 29

NEWARK LIBERTY INTL (EWR)

RNP APCH - GPS. RADAR required.	MISSED APPROACH: (Do not exceed 1.65K until Rwy 29) Climb to 2000 on the extended visual approach track to Rwy 29, then climb to 3000 direct MUFIE and hold.
▼ Rwy 29 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 29 at night, operational VGSIL required, remain at or above VGSIL glidepath until threshold. ▲ Caution, departing TEB Rwy 24 traffic climbing to 1500' MSL.	

D-ATIS 115.7 134.825	NEWARK APP CON 128.55 379.9	NEWARK TOWER 118.3 257.6	GND CON 121.8
-------------------------	--------------------------------	-----------------------------	------------------

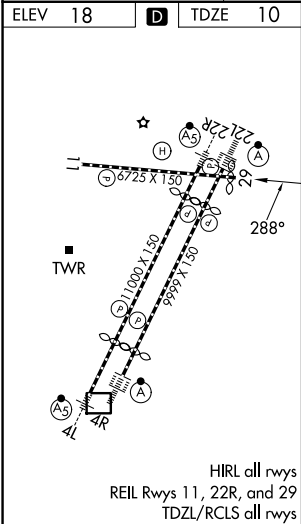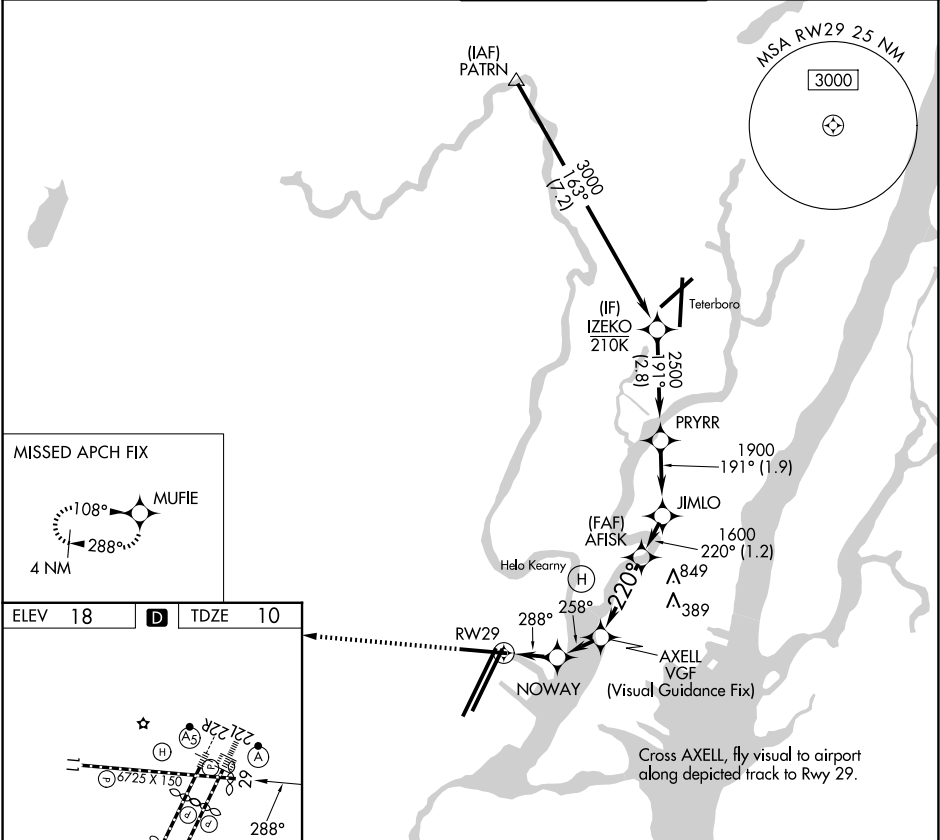

2000 ↑ to RW29	3000 ↑ MUFIE	Turns required in the visual segment. * Recommended ALT.					IZEKO
CATEGORY		A		B	C		D
LNAV MDA		880-3		870 (900-3)			

NE-2, 09 JUL 2026 to 06 AUG 2026

NE-2, 09 JUL 2026 to 06 AUG 2026