


WAAS CH 56322 W23A	APP CRS 227°	Rwy Ldg 8995 TDZE 26 Apt Elev 26
--	------------------------	---

RNAV (GPS) Z RWY 23

NORFOLK INTL (ORF)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 2000 direct CALEY and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility all Cats to 1 SM.	AS	

ATIS 127.15	NORFOLK APP CON 118.9 353.7	NORFOLK TOWER 120.8 257.8	GND CON 121.9
-----------------------	---------------------------------------	-------------------------------------	-------------------------

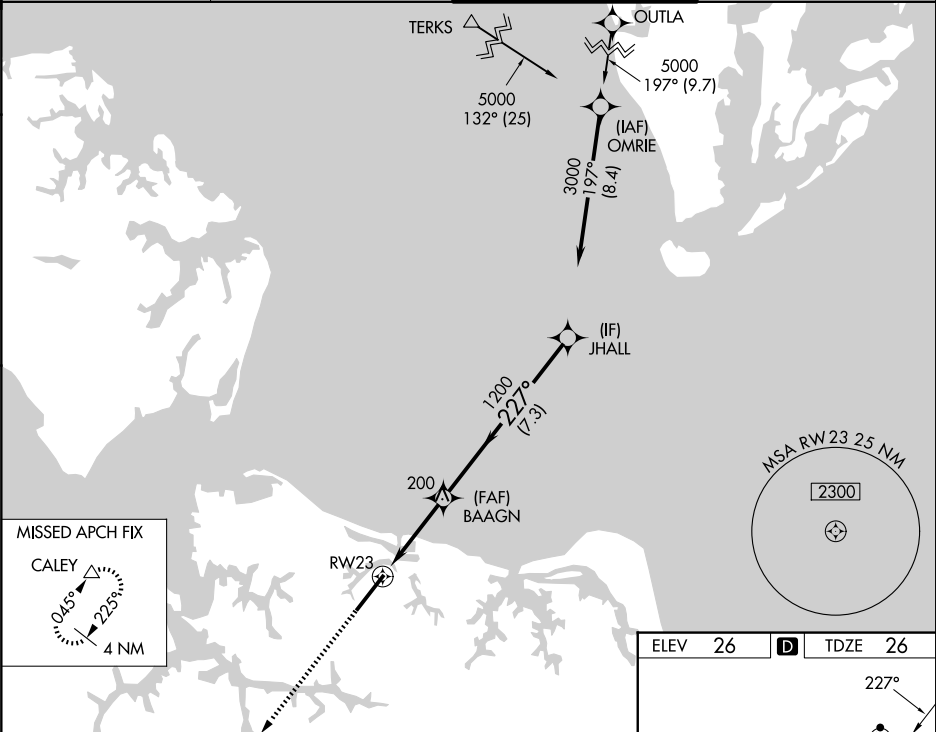

2000	CALEY			
↑	△			
		1.3 NM to RW23	BAAGN 1200	JHALL 3000
			1200	GP 3.00° TCH 55
		1.3 NM	2.3 NM	7.3 NM
CATEGORY	A	B	C	D
LPV DA		226-½ 200 (200-½)		
LNAV/VNAV DA		403-⅝ 377 (400-⅝)		
LNAV MDA	480-½	454 (500-½)	480-⅞ 454 (500-⅞)	
CIRCLING	480-1 454 (500-1)	540-1 514 (600-1)	540-1½ 514 (600-1½)	900-2¾ 874 (900-2¾)

