
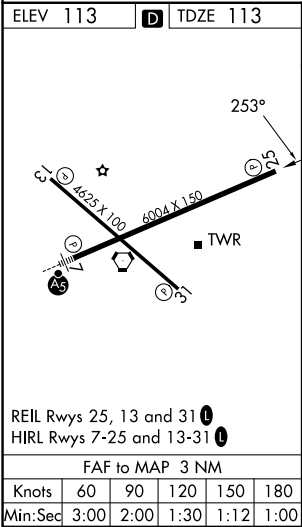


LOC/DME I-EXO 109.35 Chan 30(Y)	APP CRS 253°	Rwy Ldg TDZE 113 Apt Elev 113
---	------------------------	---

ILS or LOC RWY 25
ORLANDO EXEC (ORL)

DME or RADAR required.		MISSED APPROACH: Climb to 600 then climbing right turn to 1700 on heading 315° and on ORL VORTAC R-303 to FTEEN/ORL 13.8 DME and hold.	
ATIS 127.25	ORLANDO APP CON 119.4 351.9 (7) 125,225 351.9 (25)	EXECUTIVE TOWER ★ 118.7(CTAF) 0 239.0	GND CON 121.4 239.0
		UNICOM 122.95	

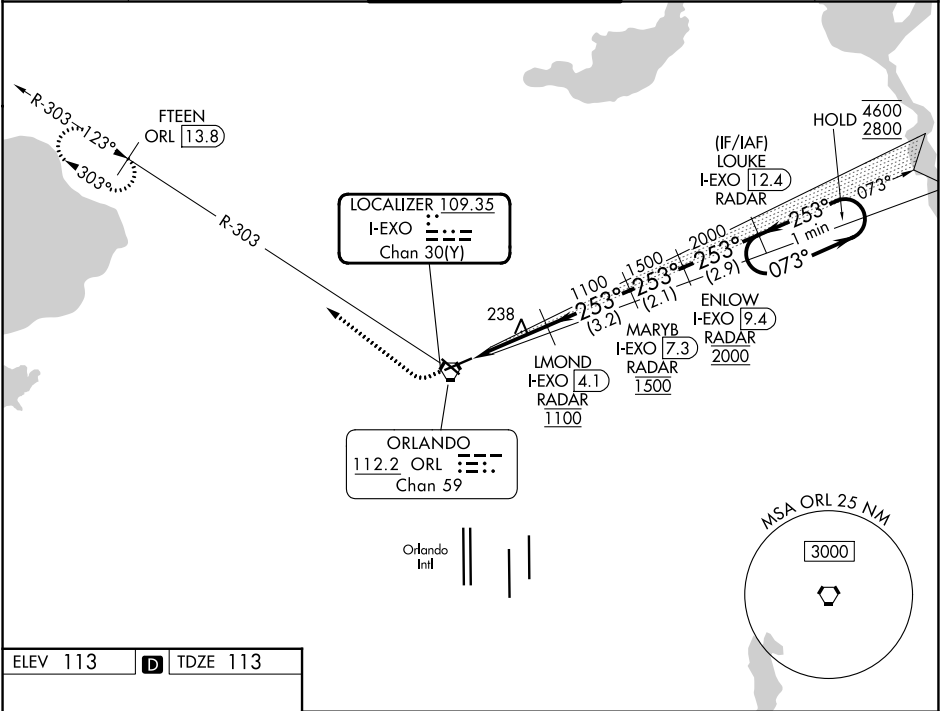

600		1700	ORL R-303	FTEEN ORL 13.8	One Minute Holding Pattern	
253°		hdg 315°				
I-EXO 1.2		I-EXO 2.2	I-EXO 4.1	I-EXO 7.3	I-EXO 9.4	I-EXO 12.4
1100		1100	1500	2000	253°	4600
1.1 NM		1.9 NM	3.2 NM	2.1	2.9 NM	2800
CATEGORY	A		B		C	
S-ILS 25	313-¾		200 (200-¾)			
S-LOC 25	500-1		387 (400-1)		500-1½ 387 (400-1½)	
CIRCLING	580-1		680-1		860-2¼ 860-2½	
		467 (500-1)		567 (600-1)		747 (800-2¼) 747 (800-2½)