


WAAS CH 97322 W27A	APP CRS 268°	Rwy Ldg 9912 TDZE 10 Apt Elev 36
--	------------------------	---

RNAV (GPS) RWY 27L

PHILADELPHIA INTL (PHL)

RNP APCH - GPS.	MALSR 	MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct WUDRR and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.		

D-ATIS 133.4	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER 118.5 327.05 (08/26, 09L/27R, 17/35) 135.1 327.05 (09R/27L)	GND CON 121.9 348.6
------------------------	--	--	-------------------------------

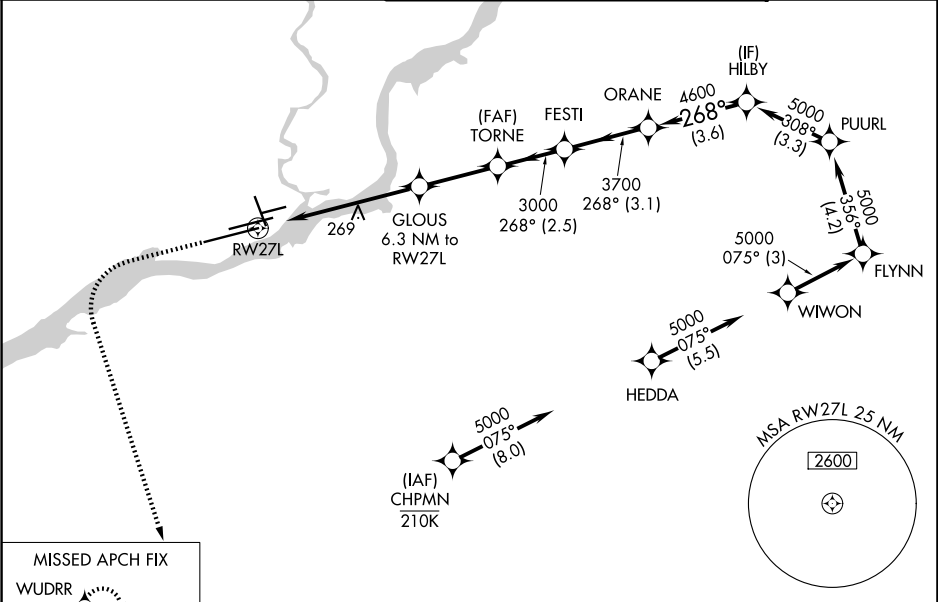

MISSED APCH FIX WUDRR 		ELEV 36	TDZE 10
------------------------------	--	----------------	----------------

