


APP CRS	Rwy Ldg	9500
087°	TDZE	13
	Apt Elev	36

RNAV (RNP) Z RWY 9L

PHILADELPHIA INTL (PHL)

RNP AR APCH - GPS.	MALSR	MISSED APPROACH: Climb to 3000 on track 087° to CUBUT and on track 173° to FIDAX and on track 259° to OOD VORTAC and hold.
For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. For inop ALS, increase RNP 0.11 visibility all Cats to RVR 6000 and RNP 0.30 visibility all Cats to 1½ SM.		

D-ATIS	PHILADELPHIA APP CON	PHILADELPHIA TOWER	GND CON
133.4	124.35 319.15	118.5 327.05 (08/26, 09L/27R, 17/35) 135.1 327.05 (09R/27L)	121.9 348.6

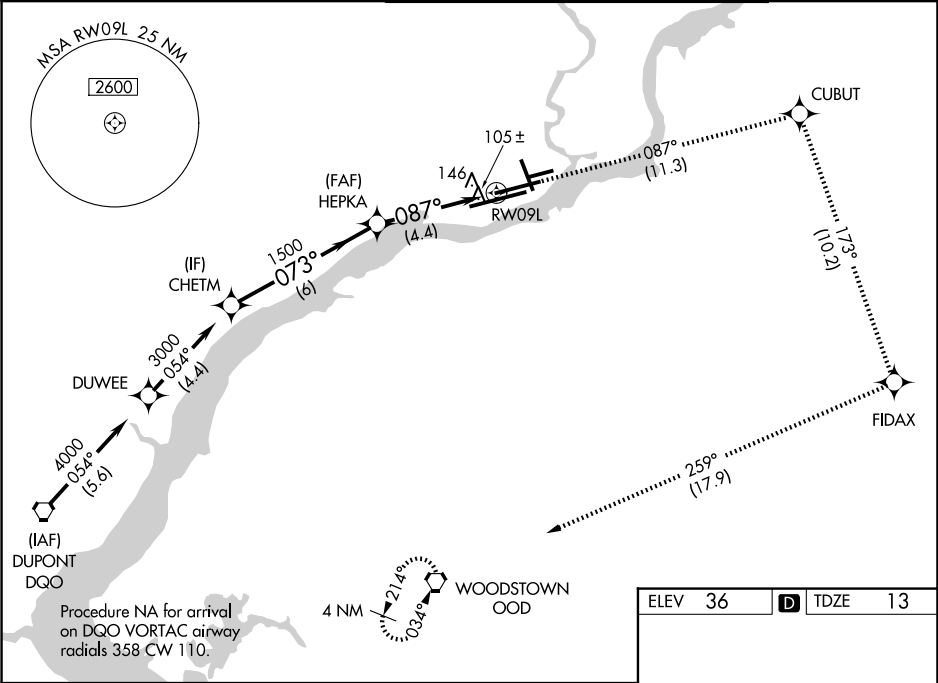

CHETM 3000 GP 3.00° TCH 58 073° HEPKA 1500 087° RW09L 6 NM 4.4 NM					3000 ↑ tr 087° CUBUT ✦ tr 173° FIDAX ✦ tr 259° OOD ⬡					
CATEGORY	A	B	C	D						
RNP 0.11 DA	382/35 369 (400-%)									
RNP 0.30 DA	434/45 421 (400-%)									
AUTHORIZATION REQUIRED					087° 2500 X 150 12000 X 200 0.5% UP 5001 X 150 TWR					