WAAS CH 40023 W09A	APP CRS 087°	Rwy Ldg 12000 TDZE 21 Apt Elev 36

RNAV (GPS) Y RWY 9R
PHILADELPHIA INTL (PHL)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV visibility all Cats to RVR 5000 and LNAV Cats C/D visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct OOD VORTAC and hold.

D-ATIS	PHILADELPHIA APP CON	PHILADELPHIA TOWER	GND CON
133.4	124.35 319.15	118.5 327.05 (08/26, 09L/27R, 17/35) 135.1 327.05 (09R/27L)	121.9 348.6

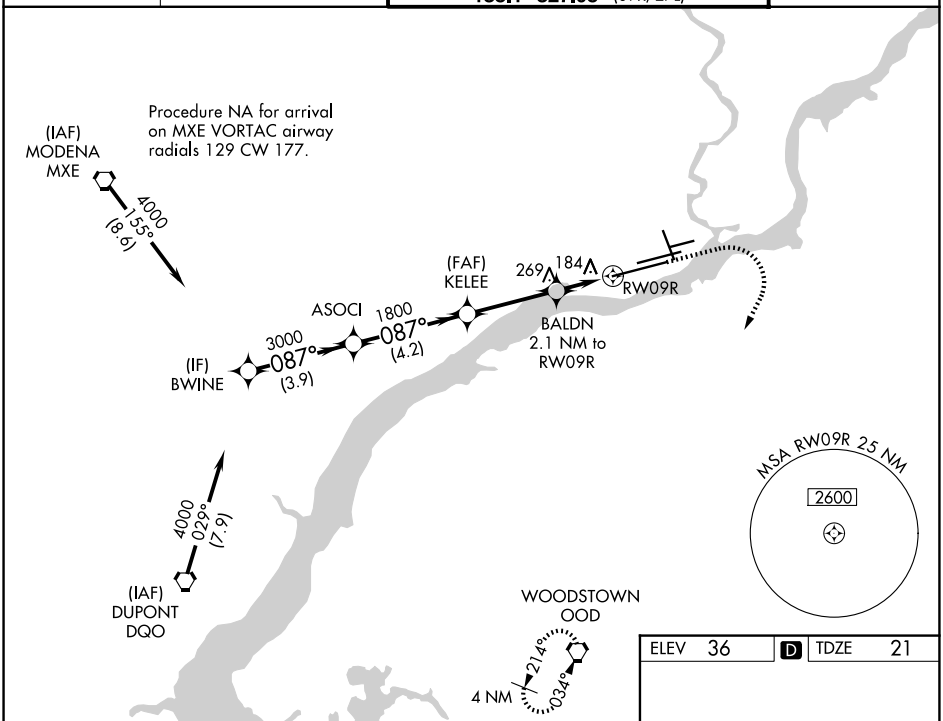

ELEV 36	D	TDZE 21

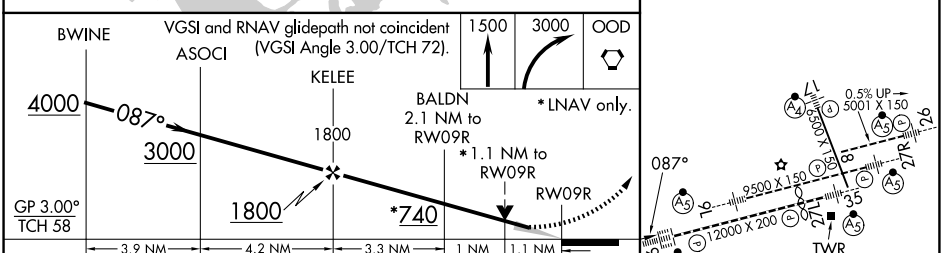

CATEGORY	A	B	C	D
LPV DA	221/18 200 (200-½)			
LNAV/VNAV DA	346/30 325 (400-⅝)			
LNAV MDA	440/24 419 (500-½)		440/40 419 (500-¾)	
CIRCLING	540-1 504 (600-1)	640-1 604 (700-1)	640-1¾ 604 (700-1¾)	720-2¼ 684 (700-2¼)

TDZ/CL Rwy 9R
HIRL all Rwys
REIL Rwys 9L and 35

NE-4, 09 JUL 2026 to 06 AUG 2026

NE-4, 09 JUL 2026 to 06 AUG 2026