

WAAS CH 40022 W25A	APP CRS 258°	Rwy Ldg 10300 TDZE 1134 Apt Elev 1135
--	------------------------	--

RNAV (GPS) Y RWY 25R

PHOENIX SKY HARBOR INTL (PHX)


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized with ILS or LOC Rwy 26. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.

MISSED APPROACH: Climb to 5000 direct YECXY and via 260° track to BKK VORTAC and hold.

D-ATIS 127.575	PHOENIX APP CON 128.65 353.9	PHOENIX TOWER 118.7 278.8 (8-26) 120.9 254.3 (7L-25R, 7R-25L)	GND CON 119.75 269.2 (N) 132.55 269.2 (S)
--------------------------	--	---	---

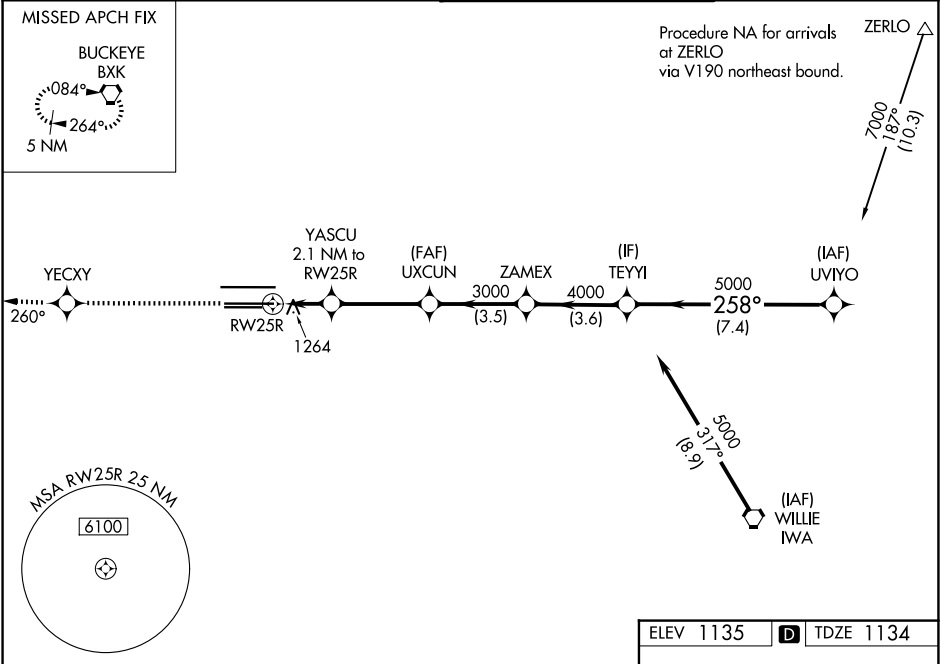

5000

↑

YECXY

✦

tr
260°

BKK

⬡

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 70).

TEYYI

UVIYO

*LNAV only.

YASCU
2.1 NM to
RW25R

UXCUN

ZAMEX

7000

Procedure
Turn
NA

GP 3.00°
TCH 55°

11489 X 150

10300 X 150

7800 X 150

25R

258°

7L7R

A2

A3

A4

A5

TWR

*1.4 NM to
RW25R

RW25R

1860*

3000

4000

5000

258°

1.4 NM

0.7 NM

3.5 NM

3.5 NM

3.6 NM

7.4 NM

CATEGORY

A

B

C

D

LPV DA

1439-1

305 (400-1)

LNAV/
VNAV DA

1580-1½

446 (500-1½)

LNAV MDA

1640-1

506 (600-1)

1640-1½

506 (600-1½)

CIRCLING

1740-1

605 (700-1)

2040-2¾
905 (1000-2¾)

2560-3
1425 (1500-3)

ELEV 1135

D

TDZE 1134

HIRL Rwy 8-26, 7L-25R and 7R-25L
REIL Rwy 26

SW-4, 09 JUL 2026 to 06 AUG 2026

SW-4, 09 JUL 2026 to 06 AUG 2026