

WAAS CH 53514 W11A	APP CRS 108°	Rwy Ldg TDZE Apt Elev	7006 3068 3082
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 11

ROBERTS FLD/REDMOND MUNI (RDM)

RNP APCH - GPS.

▼


⚠

🌡 -16°C

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using BDN altimeter setting. When local altimeter setting not received, use BDN altimeter setting and increase LPV DA to 3349 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 3451 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3600 then climbing right turn to 8500 direct URBIA and hold, continue climb-in-hold to 8500.

ATIS 119.025	SEATTLE CENTER 126.15 269.475	REDMOND TOWER★ 124.5 (CTAF) 256.8	GND CON 121.8	UNICOM 122.95
------------------------	---	---	-------------------------	-------------------------

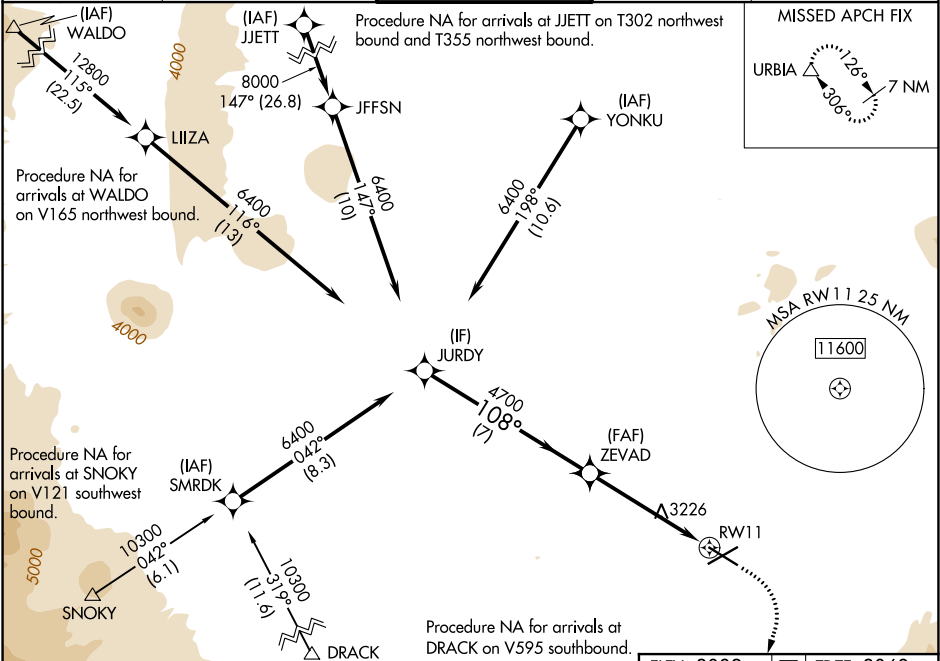

JURDY ZEVAD 6400 108° 4700 GP 3.00° TCH 50				3600 8500 URBIA	
7 NM 3.8 NM 1.2 NM				1.2 NM to RW11 RW11	
CATEGORY	A	B	C	D	
LPV DA	3268-¾ 200 (200-¾)				
LNAV/VNAV DA	3370-⅞ 302 (300-⅞)				
LNAV MDA	3480-1 412 (400-1)		3480-1½ 412 (400-1½)		
CIRCLING	3540-1 458 (500-1)	3560-1 478 (500-1)	3640-1½ 558 (600-1½)	3760-2¼ 678 (700-2¼)	

ELEV 3082

TDZE 3068

108°

0.3% UP

0.3% UP

7038 X 150

7006 X 100

29

AG

29

REIL Rwys 5, 11, and 29

HIRL Rwy 5-23

MIRL Rwy 11-29

NW-1, 09 JUL 2026 to 06 AUG 2026

NW-1, 09 JUL 2026 to 06 AUG 2026