

APP CRS 167°	Rwy Ldg 10001 TDZE 4415 Apt Elev 4415
------------------------	--

RNAV (RNP) Y RWY 17R
RENO/TAHOE INTL (RNO)

RNP AR APCH - GPS, RF, min RNP 0.50.
Authorization required.

T For uncompensated salt water systems, procedure NA below -10°C or above 54°C. For inop ALS, increase RNP 0.1 DA all Cats visibility to RVR 5500, increase RNP 0.2 DA all Cats visibility to 1% SM, increase RNP 0.3 DA all Cats visibility to 1% SM.

MALSR

MISSED APPROACH: Climb to 13000 on track 167° to ZAKBI and on track 183° to USINE and on track 127° to YARKU and hold, continue climb-in-hold to 13000.


* Missed approach requires minimum climb of 223 feet per NM to 7200.

Missed approach requires minimum climb of 267 feet per NM to 7200.

† Missed approach requires minimum climb of 209 feet per NM to 7200.

** Missed approach requires minimum climb of 260 feet per NM to 7200.


D-ATIS	NORCAL APP CON				RENO TOWER		GND CON	
135.8 363.0	119.2	279.55	126.3	353.9	118.7	257.8	121.9	348.6

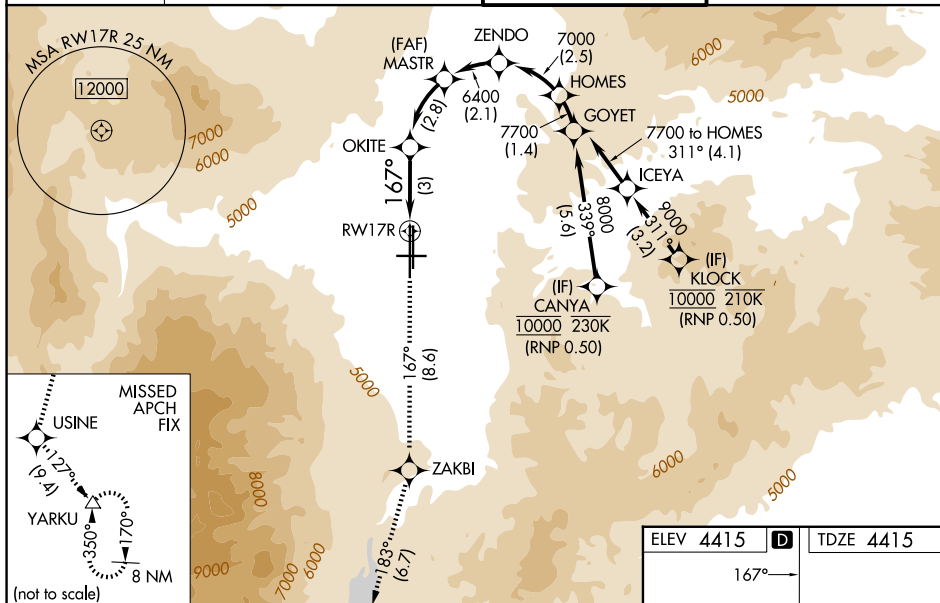

13000 ↑ fr 167°	ZAKBI ✦	tr 183°	USINE ✦	tr 127°	YARKU △	See planview for multiple IF locations.	
						ZENDO	HOMES
						MASTR 6400	7700
						7000	GP 3.08° TCH 75
						6400	
						5471	
						5471	
						3 NM	2.8 NM
						2.1 NM	2.5 NM

CATEGORY	A	B	C	D
RNP 0.10 DA #		4761/30	346 (400-5%)	
RNP 0.19 DA**		4811/35	396 (400-5%)	
RNP 0.20 DA *		4994-1¼	579 (600-1¼)	
RNP 0.30 DA †		5094-1½	679 (700-1½)	

AUTHORIZATION REQUIRED

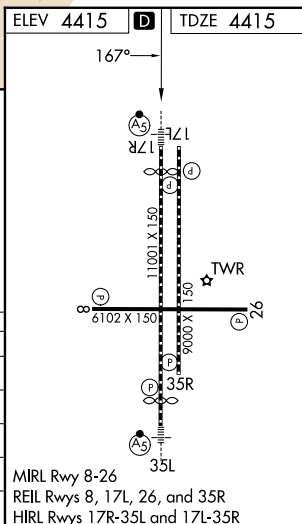

RNAV (RNP) Y RWY 17R