


APP CRS	Rwy Ldg	9000
167°	TDZE	4415
	Apt Elev	4415


RNAV (RNP) Z RWY 17L
RENO/TAHOE INTL (RNO)

RNP AR APCH - GPS. Authorization required. From TLLAK, OGIKO: RF. From AVVVY, ROWWS: min RNP 0.50. From WINRZ, DIDBE: min RNP 0.80.	MISSED APPROACH: Climb to 13000 on track 167° to ZIDGO and on track 184° to USINE and on track 127° to YARKU and hold, continue climb-in-hold to 13000. * Missed approach requires minimum climb of 266 feet per NM to 7200. # Missed approach requires minimum climb of 256 feet per NM to 7180. † Missed approach requires minimum climb of 212 feet per NM to 7140.
▼ -13°C For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C.	

D-ATIS	NORCAL APP CON	RENO TOWER	GND CON
135.8 363.0	119.2 279.55 126.3 353.9	118.7 257.8	121.9 348.6

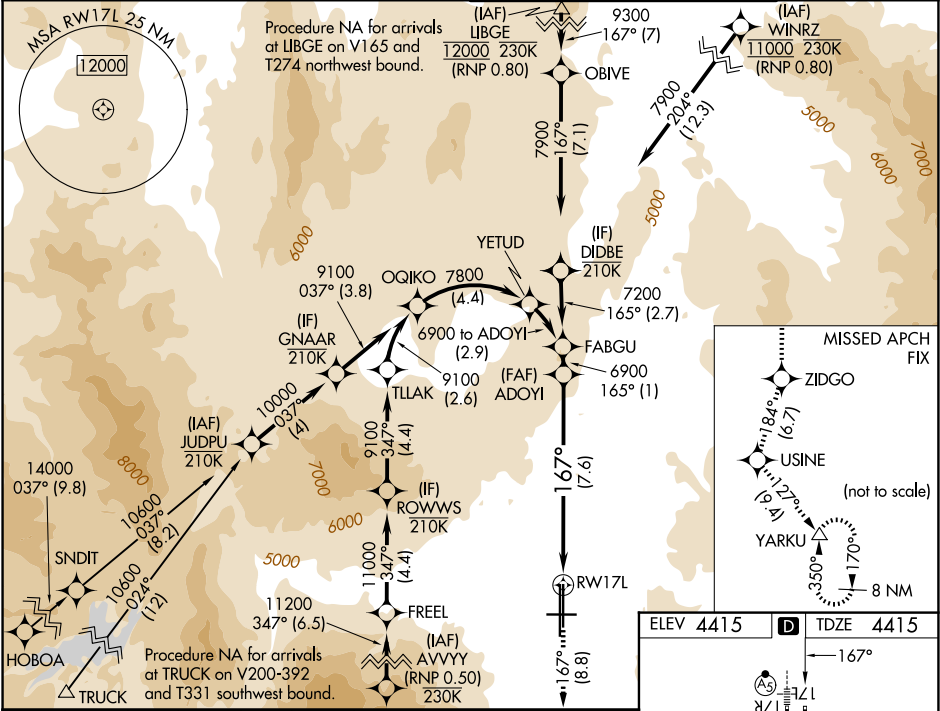

13000	ZIDGO	USINE	YARKU	ADOYI
tr 167°	tr 184°	tr 127°		6900
See planview for multiple IF locations.				
RWY 17L				
7.6 NM				
CATEGORY	A	B	C	D
RNP 0.10 DA *		4742-1	327 (400-1)	
RNP 0.12 DA #		4792-1	377 (400-1)	
RNP 0.15 DA †		5016-1¾	601 (700-1¾)	
RNP 0.30 DA		5115-2	700 (700-2)	

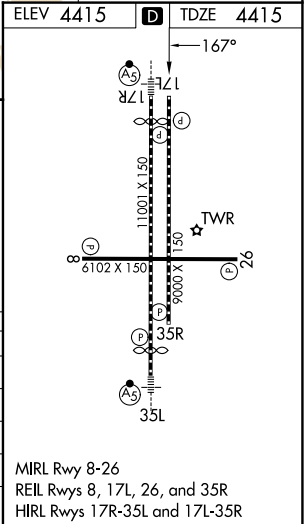

AUTHORIZATION REQUIRED