

WAAS
CH **72720**
W16A

APP CRS
157°

Rwy Ldg
TDZE **167**
Apt Elev **168**

RNAV (GPS) Z RWY 16

RICHMOND INTL (RIC)



RNP APCH

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). For inop ALS increase LNAV/VNAV all Cats visibility to RVR 5400. ** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:
Climb to 2500 direct
HAGLI and hold.

ATIS	POTOMAC APP CON	RICHMOND TOWER	GND CON
119.15 263.025	126.4 282.375 (001°-185°) 126.75 307.2 (186°-360°)	121.1 257.8	121.9 348.6

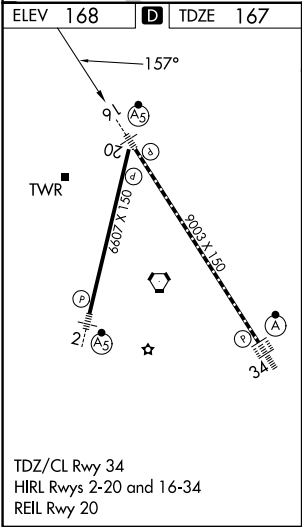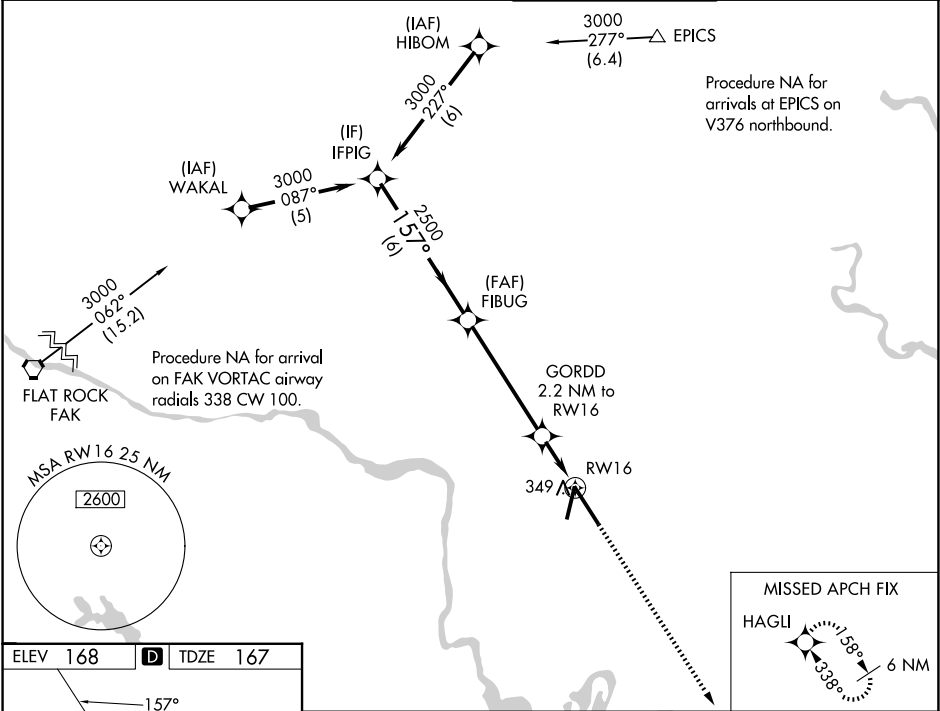

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).			
IFPIG	FIBUG	GORDD 2.2 NM to RW16	RW16
3000	2500	920*	
GP 3.00° TCH 54			
	6 NM	5 NM	1.2 NM
CATEGORY	A	B	C
LPV DA **	367/24 200 (200-½)		
LNAV/VNAV DA	504/31 337 (400-⅝)		
LNAV MDA	600/24 433 (500-½)	600/40 433 (500-¾)	
CIRCLING	660-1 492 (500-1)	700-1½ 532 (600-1½)	720-2 552 (600-2)