


25275

RNAV (RNP) Z RWY 34
ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)


 Missed approach requires RNP less than 1.0. For inop
 ALS, increase RNP 0.30* all Cats visibility to 1% SM.
 -12°C Inop table does not apply to RNP 0.30.
 For uncompensated Baro-VNAV systems, procedure
 NA below -14°C or above 54°C.

MISSED APPROACH: Climb to 6000 on track 336° to DMOSS, right turn to SETHB, right turn to JEEVY and on track 093° to PROSE and hold. * Missed approach requires minimum climb of 350 feet per NM to 4100. # Missed approach requires minimum climb of 415 feet per NM to 4100.

ATIS 132.375	ROANOKE APP CON 133.225 339.8	ROANOKE TOWER 118.3 257.8	GND CON 121.9 257.8
------------------------	---	-------------------------------------	-------------------------------

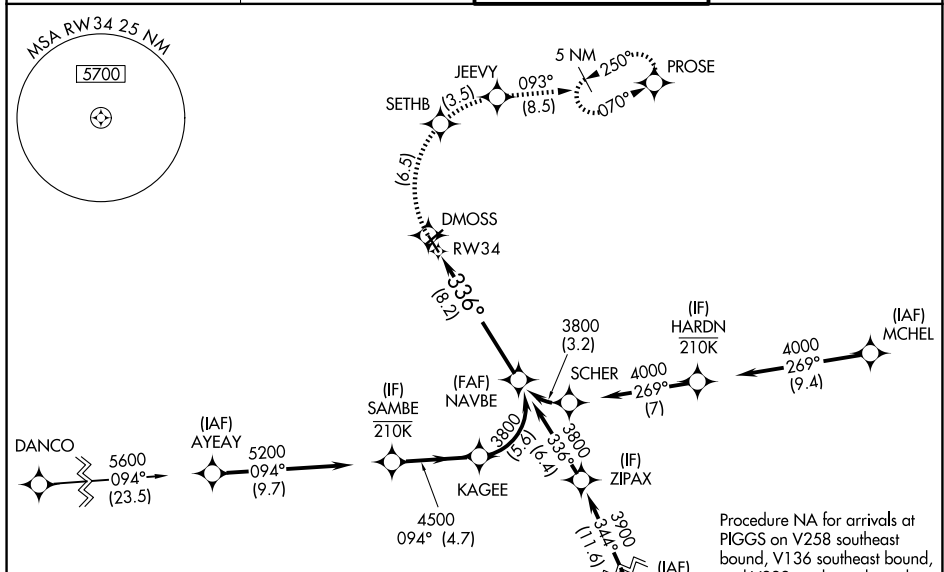

ELEV 1175	D	TDZE 1160
-----------	----------	-----------

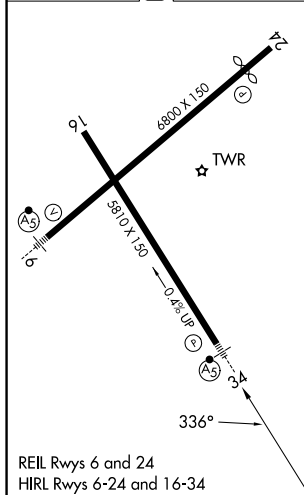

6000 ↑ tr 336°	DMOSS 		SETHB 		JEEVY 	tr 093° 	PROSE
See planview for multiple IF locations.							
RW34 336° 3800 GP 3.00° TCH 56 8.2 NM							
CATEGORY	A	B	C	D			
RNP 0.15 DA #	1495-½ 335 (400-½)						
RNP 0.30 DA*	1646-1 486 (500-1)						
RNP 0.30 DA	2115-4 955 (1000-4)						
AUTHORIZATION REQUIRED							

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)
37°20'N-79°59'W RNAV (RNP) Z RWY 34