

WAAS CH 50202 W03A	APP CRS 035°	Rwy Ldg 13000 TDZE 3667 Apt Elev 3671
--	------------------------	--

RNAV (GPS) RWY 3

ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.

▼


▲

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C. When local altimeter setting not received, Use Artesia altimeter setting; increase LPV DA to 3997 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4067 feet and all visibilities ½ SM; increase all MDAs 80 feet and LNAV visibility Cat C ⅔ SM, Cat D ⅝ SM and Circling visibility Cat D ¼ SM. Baro-VNAV and VDP NA when using Artesia altimeter setting.

MISSED APPROACH: Climb to 6000 direct AQZED and hold.

ATIS 128.45 306.2	ROSWELL APP CON ★ 119.6 239.0	ROSWELL TOWER ★ 118.5 (CTAF) 0 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-----------------------------------	-------------------------

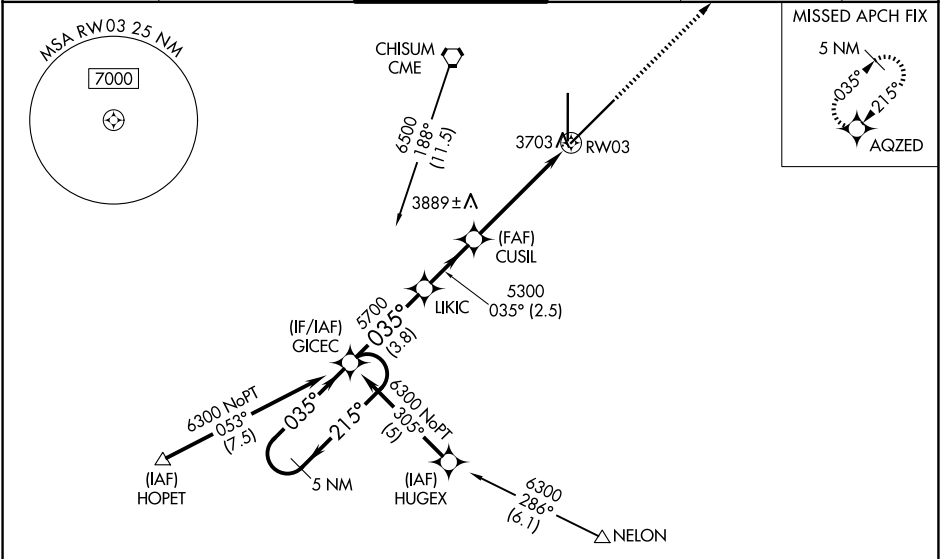

ELEV 3671		TDZE 3667	
5 NM Holding Pattern		6000 AQZED	
GP 3.00° TCH 50		1.3 NM to RWY03	
3.8 NM		2.5 NM	
3.6 NM		1.3 NM	
CATEGORY	A	B	C
LPV DA	3917-¾ 250 (300-¾)		
LNAV/VNAV DA	3987-1 320 (400-1)		
LNAV MDA	4140-1 473 (500-1)	4140-1¼ 473 (500-1¼)	4140-1½ 473 (500-1½)
CIRCLING	4140-1 469 (500-1)	4140-1½ 469 (500-1½)	4300-2 629 (700-2)

① 1000 8000

② 35

③ 035°

④ 0.3% DOWN

⑤ 1300 X 150

⑥ 0.3% UP

⑦ 65

⑧ TWR

⑨ MRL Rwy 3-21

⑩ MRL Rwy 17-35