
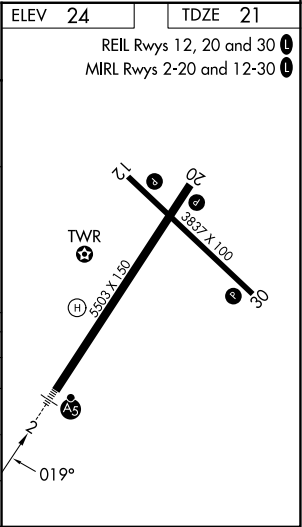


WAAS CH 62810 W02A	APP CRS 019°	Rwy Ldg 5503 TDZE 21 Apt Elev 24
--	------------------------	---

RNAV (GPS) RWY 2

SACRAMENTO EXEC (SAC)

RNP APCH-GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 7⁄8 SM, increase LNAV all Cats visibility to 1 SM. ▲			MALSR 	MISSED APPROACH: Climb to 440 then climbing left turn to 2000 direct JIRAG and hold.	
ATIS 118.075	NORCAL APP CON 125.25 257.9	EXEC TOWER ★ 119.5 (CTAF) 0 278.8	GND CON 125.0	UNICOM 122.95	

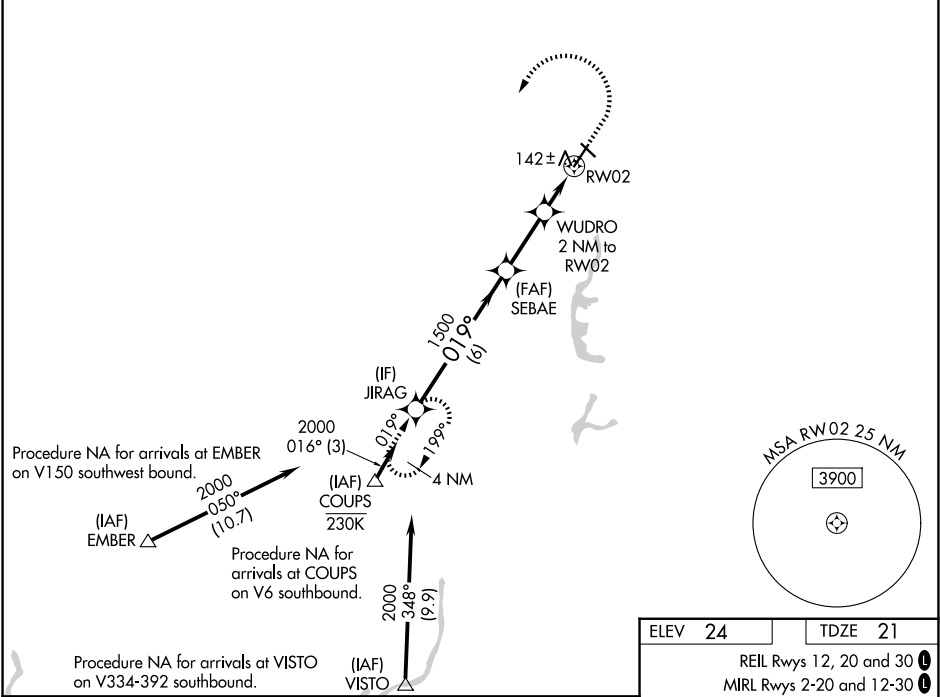

CATEGORY	A		B		C		D	
LPV DA			221-1⁄2		200 (200-1⁄2)			
LNAV/VNAV DA			304-1⁄2		283 (300-1⁄2)			
LNAV MDA	400-1⁄2		379 (400-1⁄2)		400-5⁄8		379 (400-5⁄8)	
CIRCLING	500-1		520-1		560-11⁄2		800-21⁄2	
	476 (500-1)		496 (500-1)		536 (600-11⁄2)		776 (800-21⁄2)	