
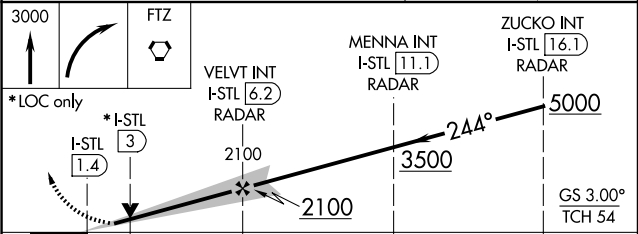
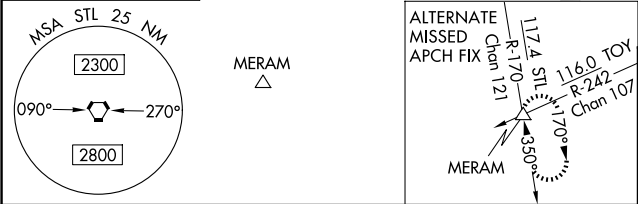



LOC/DME I-STL 110.3 Chan 40	APP CRS 244°	Rwy Ldg TDZE 7603 534 Apt Elev 618
---	------------------------	---

ILS or LOC RWY 24
ST LOUIS LAMBERT INTL (STL)

RADAR required for procedure entry.			MALS (A ₄)	MISSED APPROACH: Climb to 3000 then right turn direct FTZ VORTAC and hold.
Inop table does not apply to S-ILS 24. For inop ALS, increase S-LOC 24 Cat E visibility to 1½ SM.				
D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (11/29)	

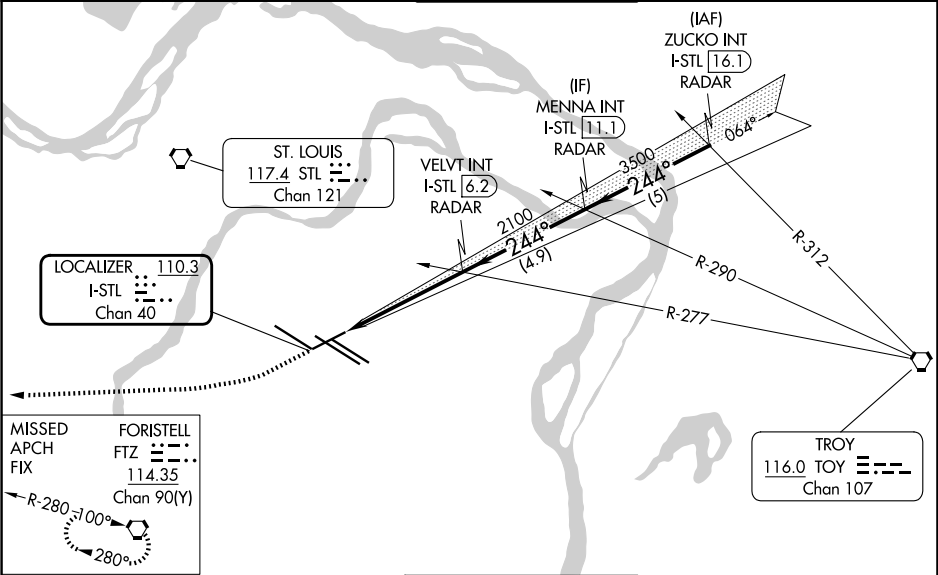

CATEGORY	A	B	C	D	E
S-ILS 24	734/40 200 (200-¾)				
S-LOC 24	1080/40	546 (500-¾)	1080-1⅜	546 (500-1⅜)	



HIRL all rwys TDZL/RCLS Rwy 11, 12L, 12R, 29, and 30R					
FAF to MAP 4.8 NM					
Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36