


WAAS CH 73000 W30A	APP CRS 303°	Rwy Ldg TDZE Apt Elev	9013 605 617
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 30R
ST LOUIS LAMBERT INTL (STL)

RNP APCH - GPS.			ALSIF-2 	MISSED APPROACH: Climb to 3000 direct IDLOC and on track 025° to FASHE and hold.
RADAR required for procedure entry.				
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Simultaneous approach authorized with Rwy 29. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500, LNAV Cat C/D/E visibility to RVR 6000.				
D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1 CPDLC

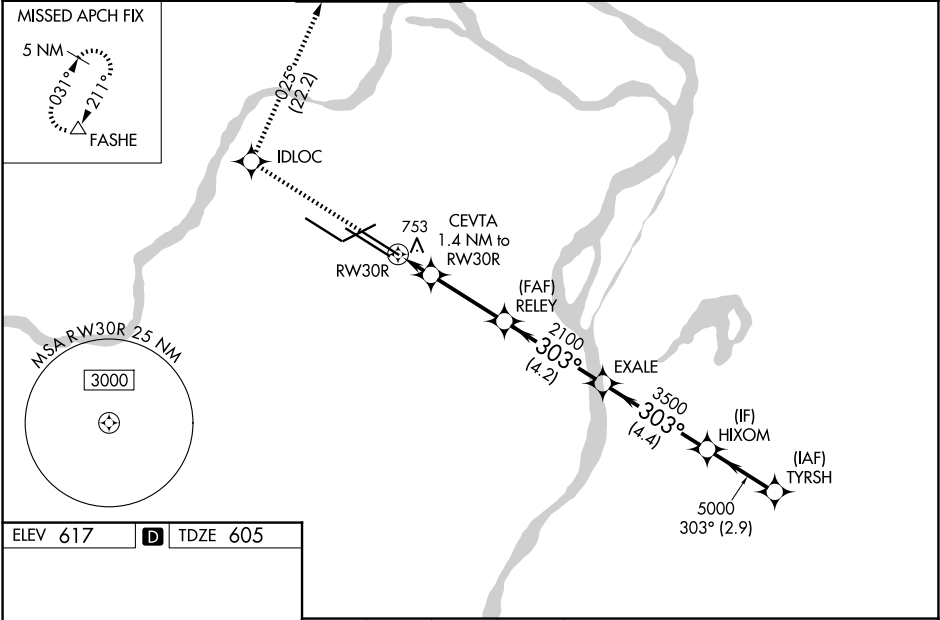

3000 IDLOC tr 025° FASHE Rwy 6-24 7603 X 150 Rwy 11-29 9000 X 150 Rwy 12L-30R 9013 X 150 Rwy 12R-30L 11020 X 150 CEVTA 1.4 NM to RWY 30R RELEY 2100 EXALE 3500 HIXOM 5000 TYRSH 5000 GP 3.00° TCH 57	3000 IDLOC tr 025° FASHE					
	CEVTA 1.4 NM to RWY 30R RELEY 2100 EXALE 3500 HIXOM 5000 TYRSH 5000					
	GP 3.00° TCH 57					
	CATEGORY	A	B	C	D	E
	LPV DA	805/18 200 (200-½)				
LNAV/VNAV DA	914/24 309 (300-½)					
LNAV MDA	1020/24 415 (500-½)		1020/40 415 (500-¾)			

NC-3, 09 JUL 2026 to 06 AUG 2026

NC-3, 09 JUL 2026 to 06 AUG 2026