



LOC/DME I-UTJ 111.5 Chan 52	APP CRS 344°	Rwy Ldg TDZE 4227 Apt Elev 4231
---	------------------------	---

LDA RWY 35
SALT LAKE CITY INTL (SLC)

RNP APCH-GPS. From GWENN or JAZZ.	MALSR	MISSED APPROACH: Climb to 4800 then climbing left turn to 9000 direct TCH VORTAC and on TCH VORTAC R-331 to OGD VORTAC and hold.
DME required. RADAR required for procedure entry at HLMET.		
Simultaneous approach authorized. For inop ALS, increase S-LDA/GS 35 all Cats visibility to RVR 4000, increase S-LDA 35 Cat E visibility to 1¼ SM. Cat E restricted to USAF/USN aircraft.		

D-ATIS 124.75 125.625	SALT LAKE CITY APP CON 125.7 284.6	SALT LAKE CITY TOWER 118.3 257.8	GND CON 121.9 348.6
---------------------------------	--	--	-------------------------------

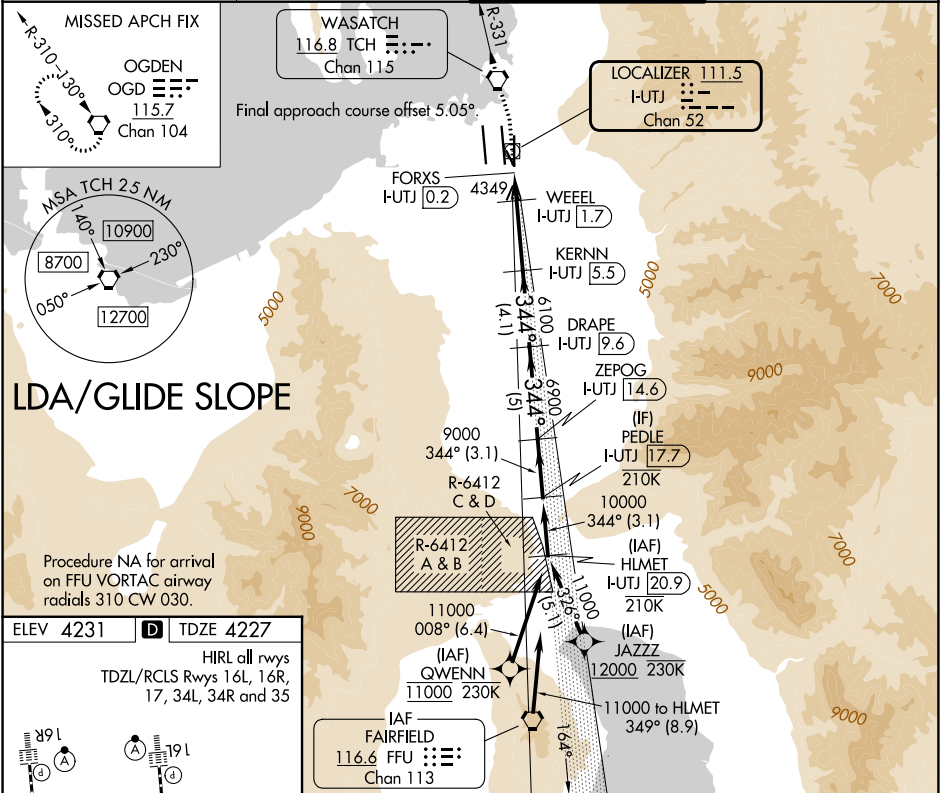

4800	9000	TCH	TCH R-331	OGD	VGSI and LDA glidepath not coincident (VGSI Angle 3.00/TCH 74).	PEDLE I-UTJ 17.7
I-UTJ DME ANTENNA	FORXS I-UTJ 0.2	WEEL I-UTJ 1.7	KERNN I-UTJ 5.5	DRAPE I-UTJ 9.6	ZEPOG I-UTJ 14.6	10000
0.4	0.7	0.8	3.8 NM	4.1 NM	5 NM	3.1 NM
CATEGORY	A	B	C	D	E	
S-LDA/GS 35	4477/24 250 (300-½)					GS 3.00° TCH 55
S-LDA 35	4660/24	433 (500-½)	4660/40	433 (500-¾)		

SW-4, 09 JUL 2026 to 06 AUG 2026

SW-4, 09 JUL 2026 to 06 AUG 2026