
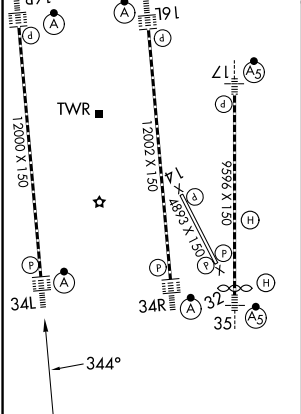


APP CRS	Rwy Ldg	12000
344°	TDZE	4229
	Apt Elev	4231

RNAV (RNP) Z RWY 34L
SALT LAKE CITY INTL (SLC)

RNP AR APCH - GPS. Authorization required. From PEFNO: RF.	ALSF-2	MISSED APPROACH: Climb to 4800 then climbing left turn to 8100 direct STACO and hold. *Missed approach requires minimum climb of 250 feet per NM to 4700.
▼ For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.10*, RNP 0.20 visibility all Cats to RVR 4500, RNP 0.30 visibility all Cats to RVR 6000.		

D-ATIS 124.75 125.625	SALT LAKE CITY APP CON 125.7 284.6	SALT LAKE CITY TOWER 132.65 336.4	GND CON 123.775 348.6
--------------------------	---------------------------------------	--------------------------------------	--------------------------

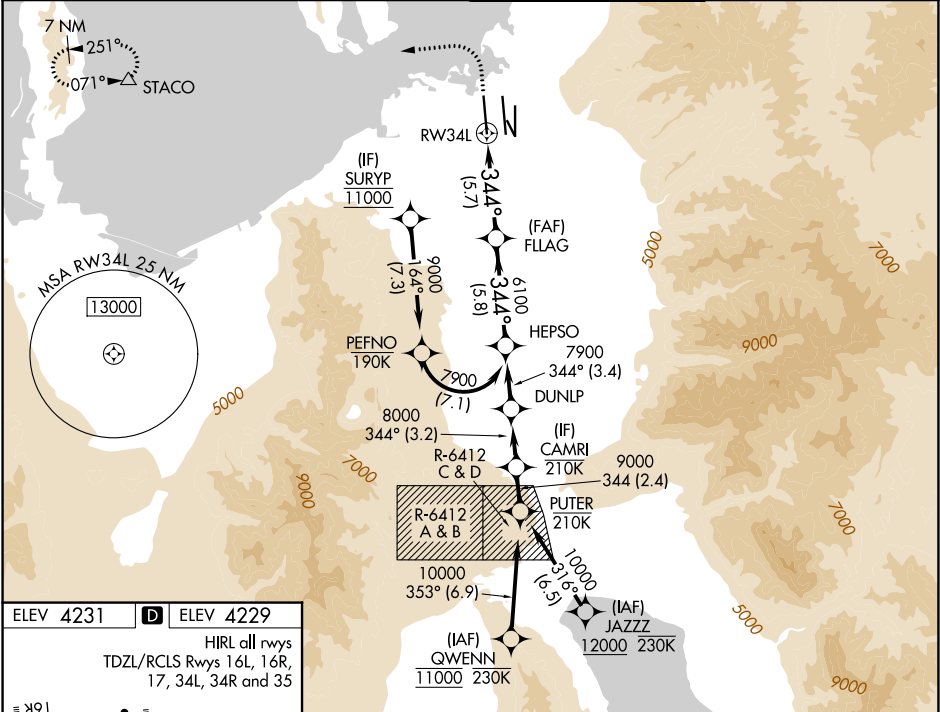

4800	8100	STACO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).	HEP
See planview for multiple IF locations.				
CATEGORY	A	B	C	D
RNP 0.10 DA*	4490/24	261 (300-½)		
RNP 0.20 DA	4530/24	301 (300-½)		
RNP 0.30 DA	4643/40	414 (500-¾)		
AUTHORIZATION REQUIRED				