


APP CRS	Rwy Ldg	12002
344°	TDZE	4225
	Apt Elev	4231

RNAV (RNP) Z RWY 34R

SALT LAKE CITY INTL (SLC)

RNP AR APCH - GPS. Authorization required.	ALSF-2	MISSED APPROACH: Climb to 9000 direct TCH VORTAC and on track 336° to OGD VORTAC and hold.
For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 54°C. Simultaneous approach authorized.		

D-ATIS 124.75 125.625	SALT LAKE CITY APP CON 125.7 284.6	SALT LAKE CITY TOWER 119.05 257.8	GND CON 123.775 348.6
--------------------------	---------------------------------------	--------------------------------------	--------------------------

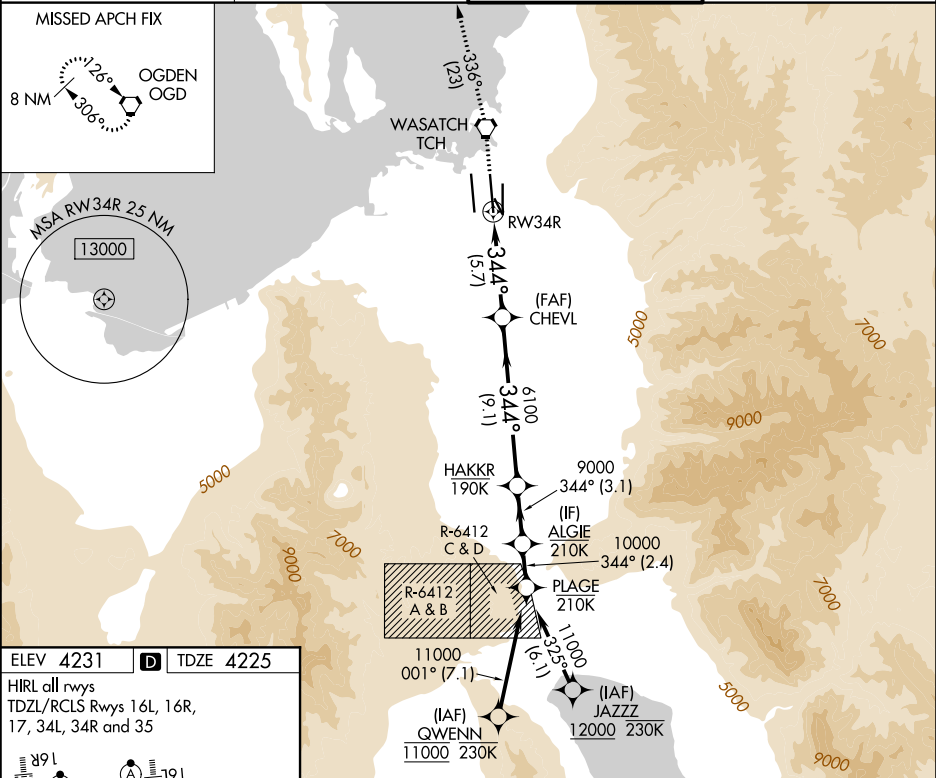

ELEV 4231 **D** TDZE 4225

HIRL all rwns
TDZL/RCLS Rwns 16L, 16R,
17, 34L, 34R and 35

Diagram of RWY 34L and 34R with various lights and markers. Includes TWR, 34L, 34R, 35, and 351. Distances are marked along the paths.

9000 ↑	TCH 	tr 336°	OGD 	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).			PLAGE ALGIE
				CHEVL 6100	HAKKR 9000	344° 11000	
RW34R 				6100	10000	GP 3.00° TCH 55	
5.7 NM				9.1 NM	3.1 NM	2.4 NM	
CATEGORY		A		B	C	D	
RNP 0.10 DA		4546/26		321 (400-½)			
RNP 0.30 DA		4609/35		384 (400-¾)			
AUTHORIZATION REQUIRED							