
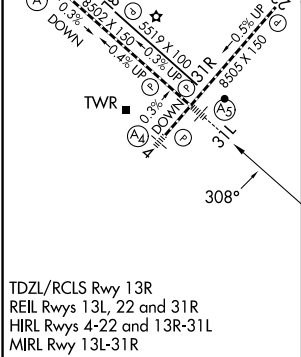


APP CRS	Rwy Ldg	8502
308°	TDZE	790
	Apt Elev	809

RNAV (RNP) Z RWY 31L
SAN ANTONIO INTL (SAT)

RNP AR APCH - GPS	MALSR	MISSED APPROACH: Climb to 4200 direct HASDO and track 307° to REUBE and hold.
For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5500, increase RNP 0.30 all Cats visibility to RVR 6000.	AS	

D-ATIS 118.9	SAN ANTONIO APP CON 125.1 307.0	SAN ANTONIO TOWER 119.8 257.8	GND CON 121.9 348.6
-----------------	------------------------------------	----------------------------------	------------------------

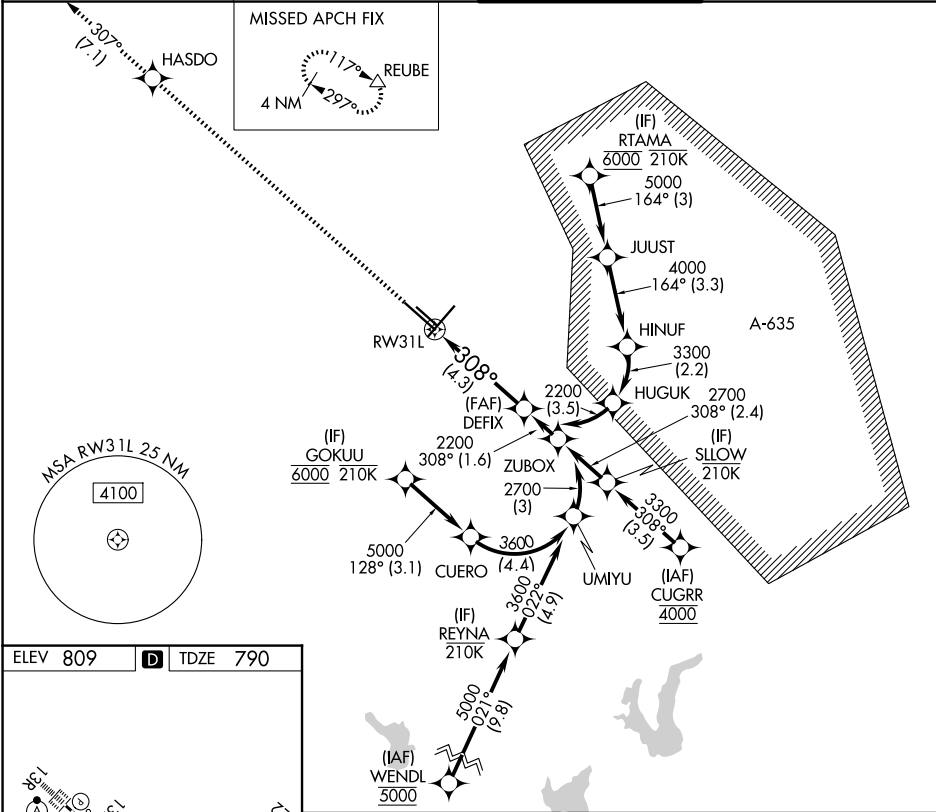

4200	HASDO	tr 307°	REUBE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 82).
See planview for multiple IF locations.	RW31L			DEFIX
				2200
				GP 3.00°
				TCH 60
CATEGORY	A	B	C	D
RNP 0.15 DA		1144/30	354 (400-%)	
RNP 0.30 DA		1200/40	410 (400-¾)	
AUTHORIZATION REQUIRED				

SC-3, 09 JUL 2026 to 06 AUG 2026

SC-3, 09 JUL 2026 to 06 AUG 2026