


WAAS CH 48803 W28A	APP CRS 284°	Rwy Ldg 11236 TDZE 13 Apt Elev 13
--	------------------------	--


RNAV (GPS) Z RWY 28R
SAN FRANCISCO INTL (SFO)

RNP APCH - GPS.  Circling NA to Rwy's 10L, 10R, 19L, and 19R. Circling Rwy 1L, 1R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 1/4 SM, increase LNAV Cat C/D visibility to 2 SM.	ALSF-2 	MISSED APPROACH: Climb to 3000 direct VIKUY and hold. *Missed approach requires minimum climb of 350 feet per NM to 1900; if unable to meet climb gradient, see RNAV (GPS) RWY 28L.
--	--	---


D-ATIS 113.7 115.8 118.85	NORCAL APP CON 134.5 338.2	SAN FRANCISCO TOWER 120.5 269.1	GND CON 121.8
-------------------------------------	--------------------------------------	---	-------------------------

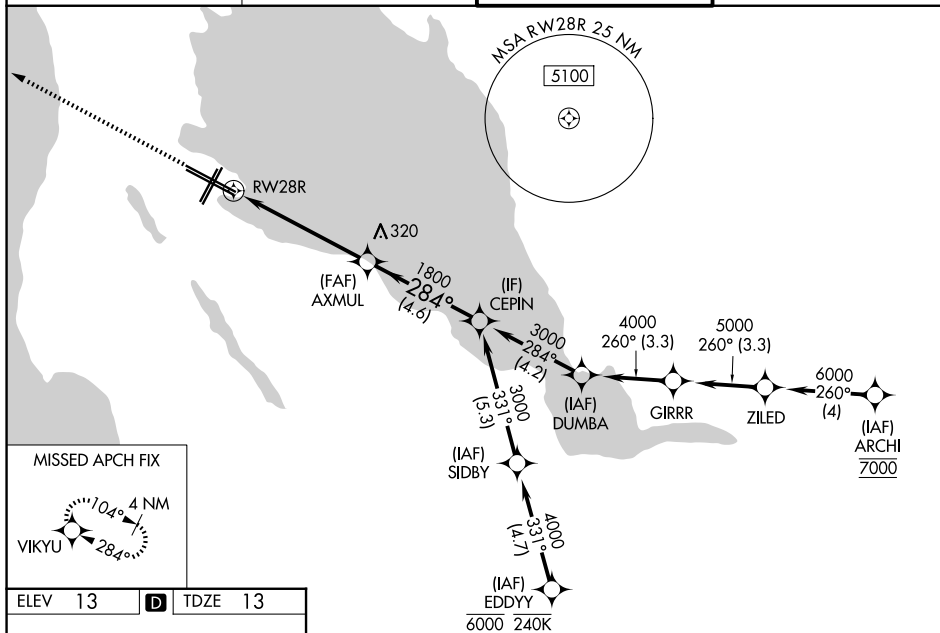

ELEV	13	D	TDZE	13
------	----	----------	------	----



TDZL/RCLS Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L
HIRL all rwys

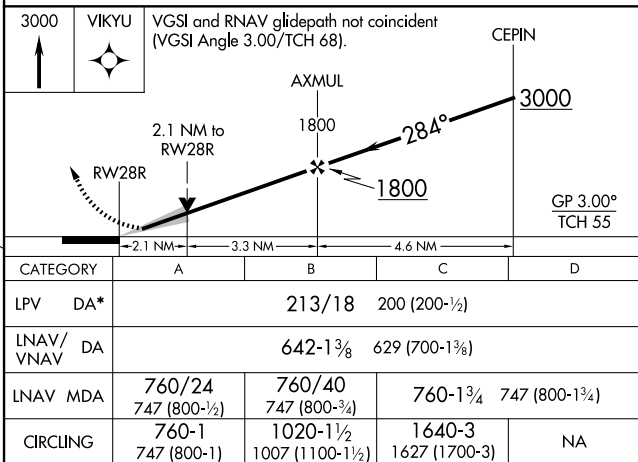

RNAV (GPS) Z RWY 28R