

WAAS CH 70524 W32A	APP CRS 321°	Rwy Ldg TDZE 621 Apt Elev 623
--	------------------------	---

RNAV (GPS) RWY 32

TOLEDO EXEC (TDZ)

RNP APCH.


▼

▲

Circling Rwy 14 NA at night. Baro-VNAV NA when using Toledo Express altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). Rwy 32 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Toledo Express altimeter setting and increase LPV DA to 914, LNAV/VNAV to 1123, increase LPV all Cats visibility ⅛ SM. Increase all MDA 60 feet and increase LNAV Cats C and D and Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climb to 1100 then climbing left turn to 2300 direct WIMLU and hold.

ASOS 121.575	TOLEDO APP CON 126.1 307.0	CLNC DEL 125.6	UNICOM 123.05 (CTAF) 1
------------------------	--------------------------------------	--------------------------	---

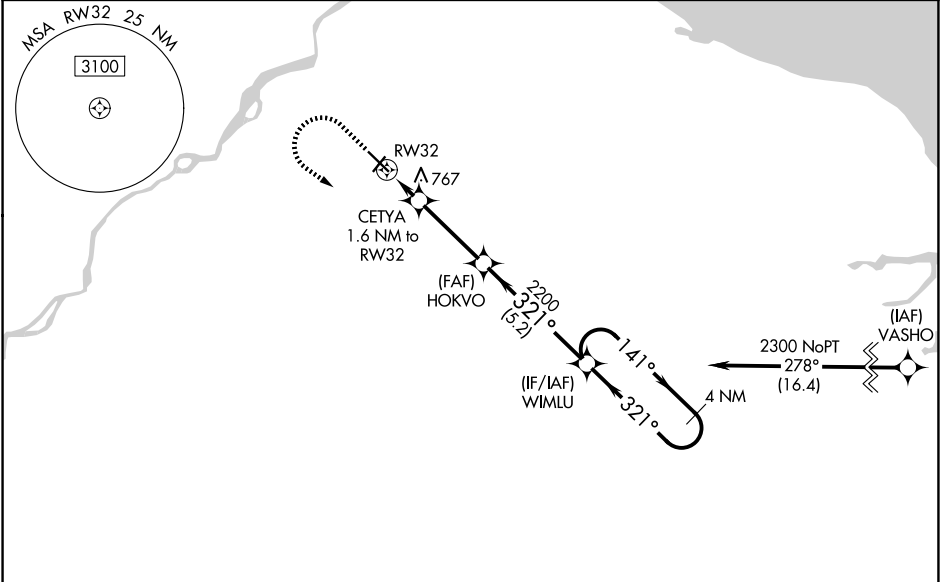

ELEV 623 **D** TDZE 621

REIL Rwy 4, 14 and 22 **1**
MIRL Rwy 4-22 and 14-32 **1**

	1100	2300	WIMLU	
*LNAV only.				
	CETYA 1.6 NM to RWY 32	HOKVO 2200	WIMLU 4 NM Holding Pattern	
	1.6 NM	3.2 NM	5.2 NM	
	1160*	2200	2300	
			GP 3.00° TCH 45	
CATEGORY	A	B	C	D
LPV DA		871-¾	250 (300-¾)	
LNAV/VNAV DA		1080-1⅓	459 (500-1⅓)	
LNAV MDA	1020-1	399 (400-1)	1020-1⅓	399 (400-1⅓)
CIRCLING	1080-1 457 (500-1)	1100-1 477 (500-1)	1200-1½ 577 (600-1½)	1320-2¼ 697 (700-2¼)