

LOC I-ILM 110.3	APP CRS 349°	Rwy Ldg TDZE Apt Elev 7204 31 32
---------------------------	------------------------	--

ILS Y or LOC RWY 35



WILMINGTON INTL (ILM)

ADF required. RADAR required for procedure entry.

MALSR
For inop ALS, increase S-LOC 35 Cat C/D visibility to 1½ SM.

MISSED APPROACH: Climb to 600 then climbing left turn to 1800 direct AIRLI LOM and hold.

ATIS 124.975	WILMINGTON APP CON★ 118.25 284.65 (164°-343°) 135.75 317.425 (344°-163°)	WILMINGTON TOWER★ 119.9 (CTAF) 0 239.3	GND CON 121.9 348.6	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

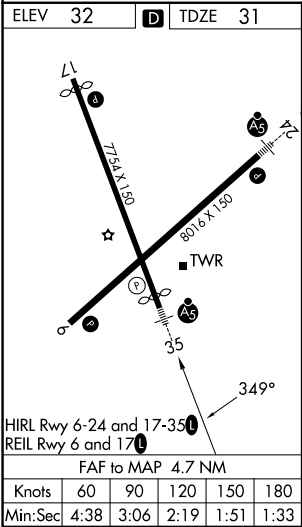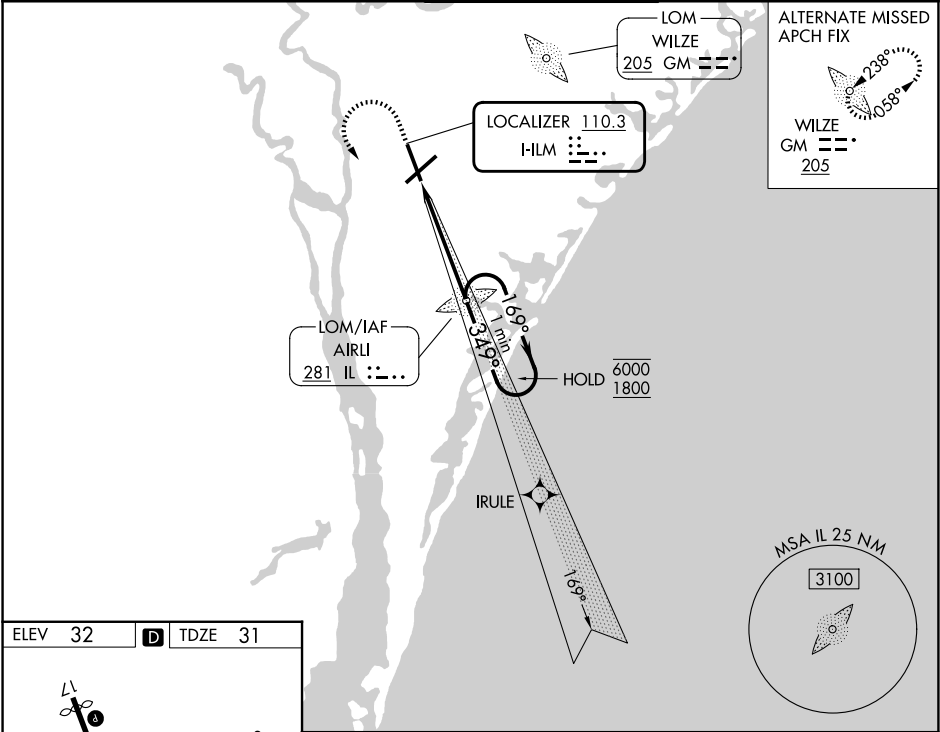

600	1800	IL	IL LOM 1576	One Minute Holding Pattern
349°	169°	349°	169°	6000 1800 GS 3.00° TCH 37
4.7 NM				
CATEGORY	A	B	C	D
S-ILS 35	242/24 211 (300-½)			
S-LOC 35	500/24 469 (500-½)		500/50 469 (500-1)	
CIRCLING	560-1 528 (600-1)		720-2 920-3 688 (700-2) 888 (900-3)	