

WAAS CH 40303 W21A	APP CRS 211°	Rwy Ldg TDZE 404 Apt Elev 410
--	------------------------	---

RNAV (GPS) Y RWY 21R

TRI-CITIES (PSC)


⚠

Baro-VNAV NA when using Hermiston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Hermiston altimeter setting. When local altimeter setting not received, use Hermiston altimeter setting and increase all DA 95 feet and all MDA 100 feet; increase LNAV/VNAV all Cats visibility 3⁄8 mile; LNAV Cat C and D visibility 3⁄8 mile and Circling Cat C and D visibility 1⁄4 mile. # RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Hermiston altimeter setting.

MALSR

MISSED APPROACH:
Climb to 1100 then climbing right turn to 5200 direct PAIDS and hold, continue climb-in-hold to 5200.

ATIS 125.65	SPOKANE APP CON * 128.75 377.2	TRI-CITIES TOWER * 135.3 (CTAF) 285.55	GND CON 121.8	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

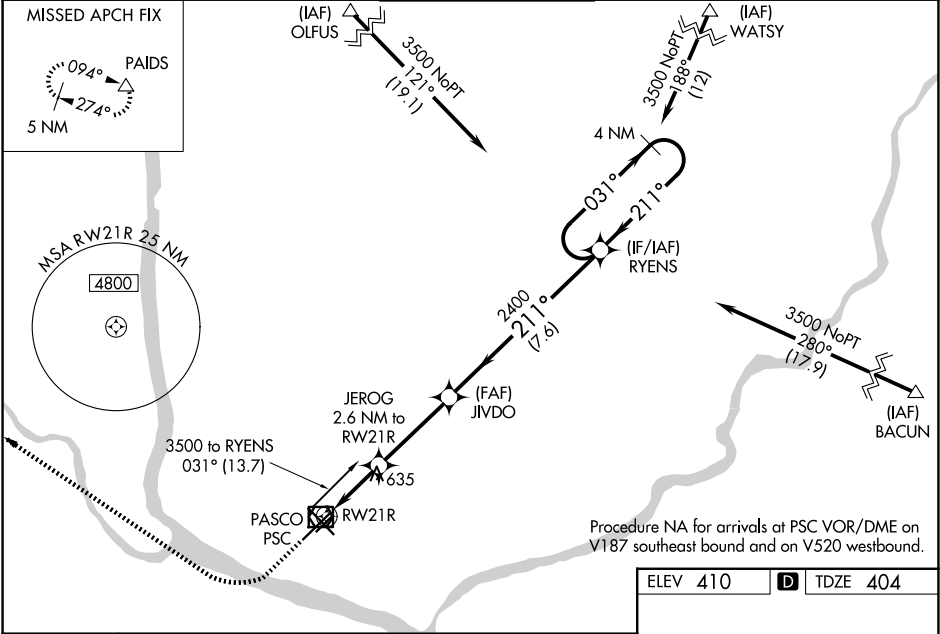

1100 5200 PAIDS				
*LNAV only				
	JEROG 2.6 NM to RW21R	JIVDO 2400	RYENS	4 NM Holding Pattern
1.5 NM	1.1 NM	3.5 NM	7.6 NM	
A		B	C	D
CATEGORY				
LPV DA#	604/24 200 (200-1⁄2)			
LNAV/VNAV DA	844/51 440 (500-1)			
LNAV MDA	940/24 536 (600-1⁄2)		940/55 536 (600-1)	
CIRCLING	940-1 530 (600-1)		1040-1 630 (700-1 3⁄4)	1100-2 690 (700-2 1⁄4)

ELEV 410 D TDZE 404

REIL Rwy 3L and 12 1
MRL Rwy 12-30 1
HIRL Rwy 3L-21R 1